


HARRIMAN UTILITY BOARD


CAST IRON GAS MAIN REPLACEMENT PHASE III & IV

HARRIMAN, TENNESSEE

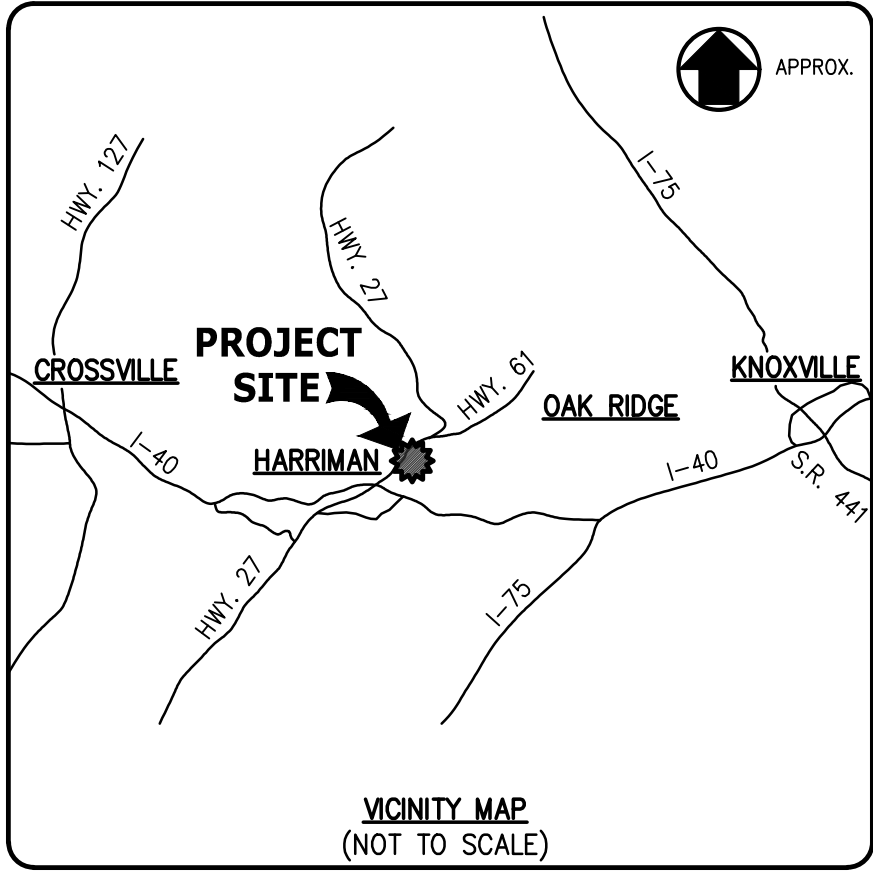

DRAWING INDEX

G0.01	COVER SHEET
G0.02	DRAWING SHEET INDEX
G0.03	GENERAL NOTES AND LEGEND
G1.01	GAS LINE 'A' PLAN STA. 0+00 TO STA. 10+03 E.O.L.
G1.02	GAS LINE 'B' PLAN STA. 0+00 TO STA. 10+62 E.O.L. & GAS LINE 'C' PLAN STA. 0+00 TO STA. 14+78 E.O.L.
G1.03	GAS LINE 'D' PLAN STA. 0+00 TO STA. 29+50
G1.04	GAS LINE 'D' PLAN STA. 29+50 TO STA. 47+00
G1.05	GAS LINE 'D' PLAN STA. 47+00 TO STA. 47+59 E.O.L. & GAS LINE 'E' PLAN STA. 0+00 TO STA. 2+93 E.O.L.
G1.06	GAS LINE 'F' PLAN STA. 0+00 TO STA. 10+09 E.O.L.
G2.01	DETAILS

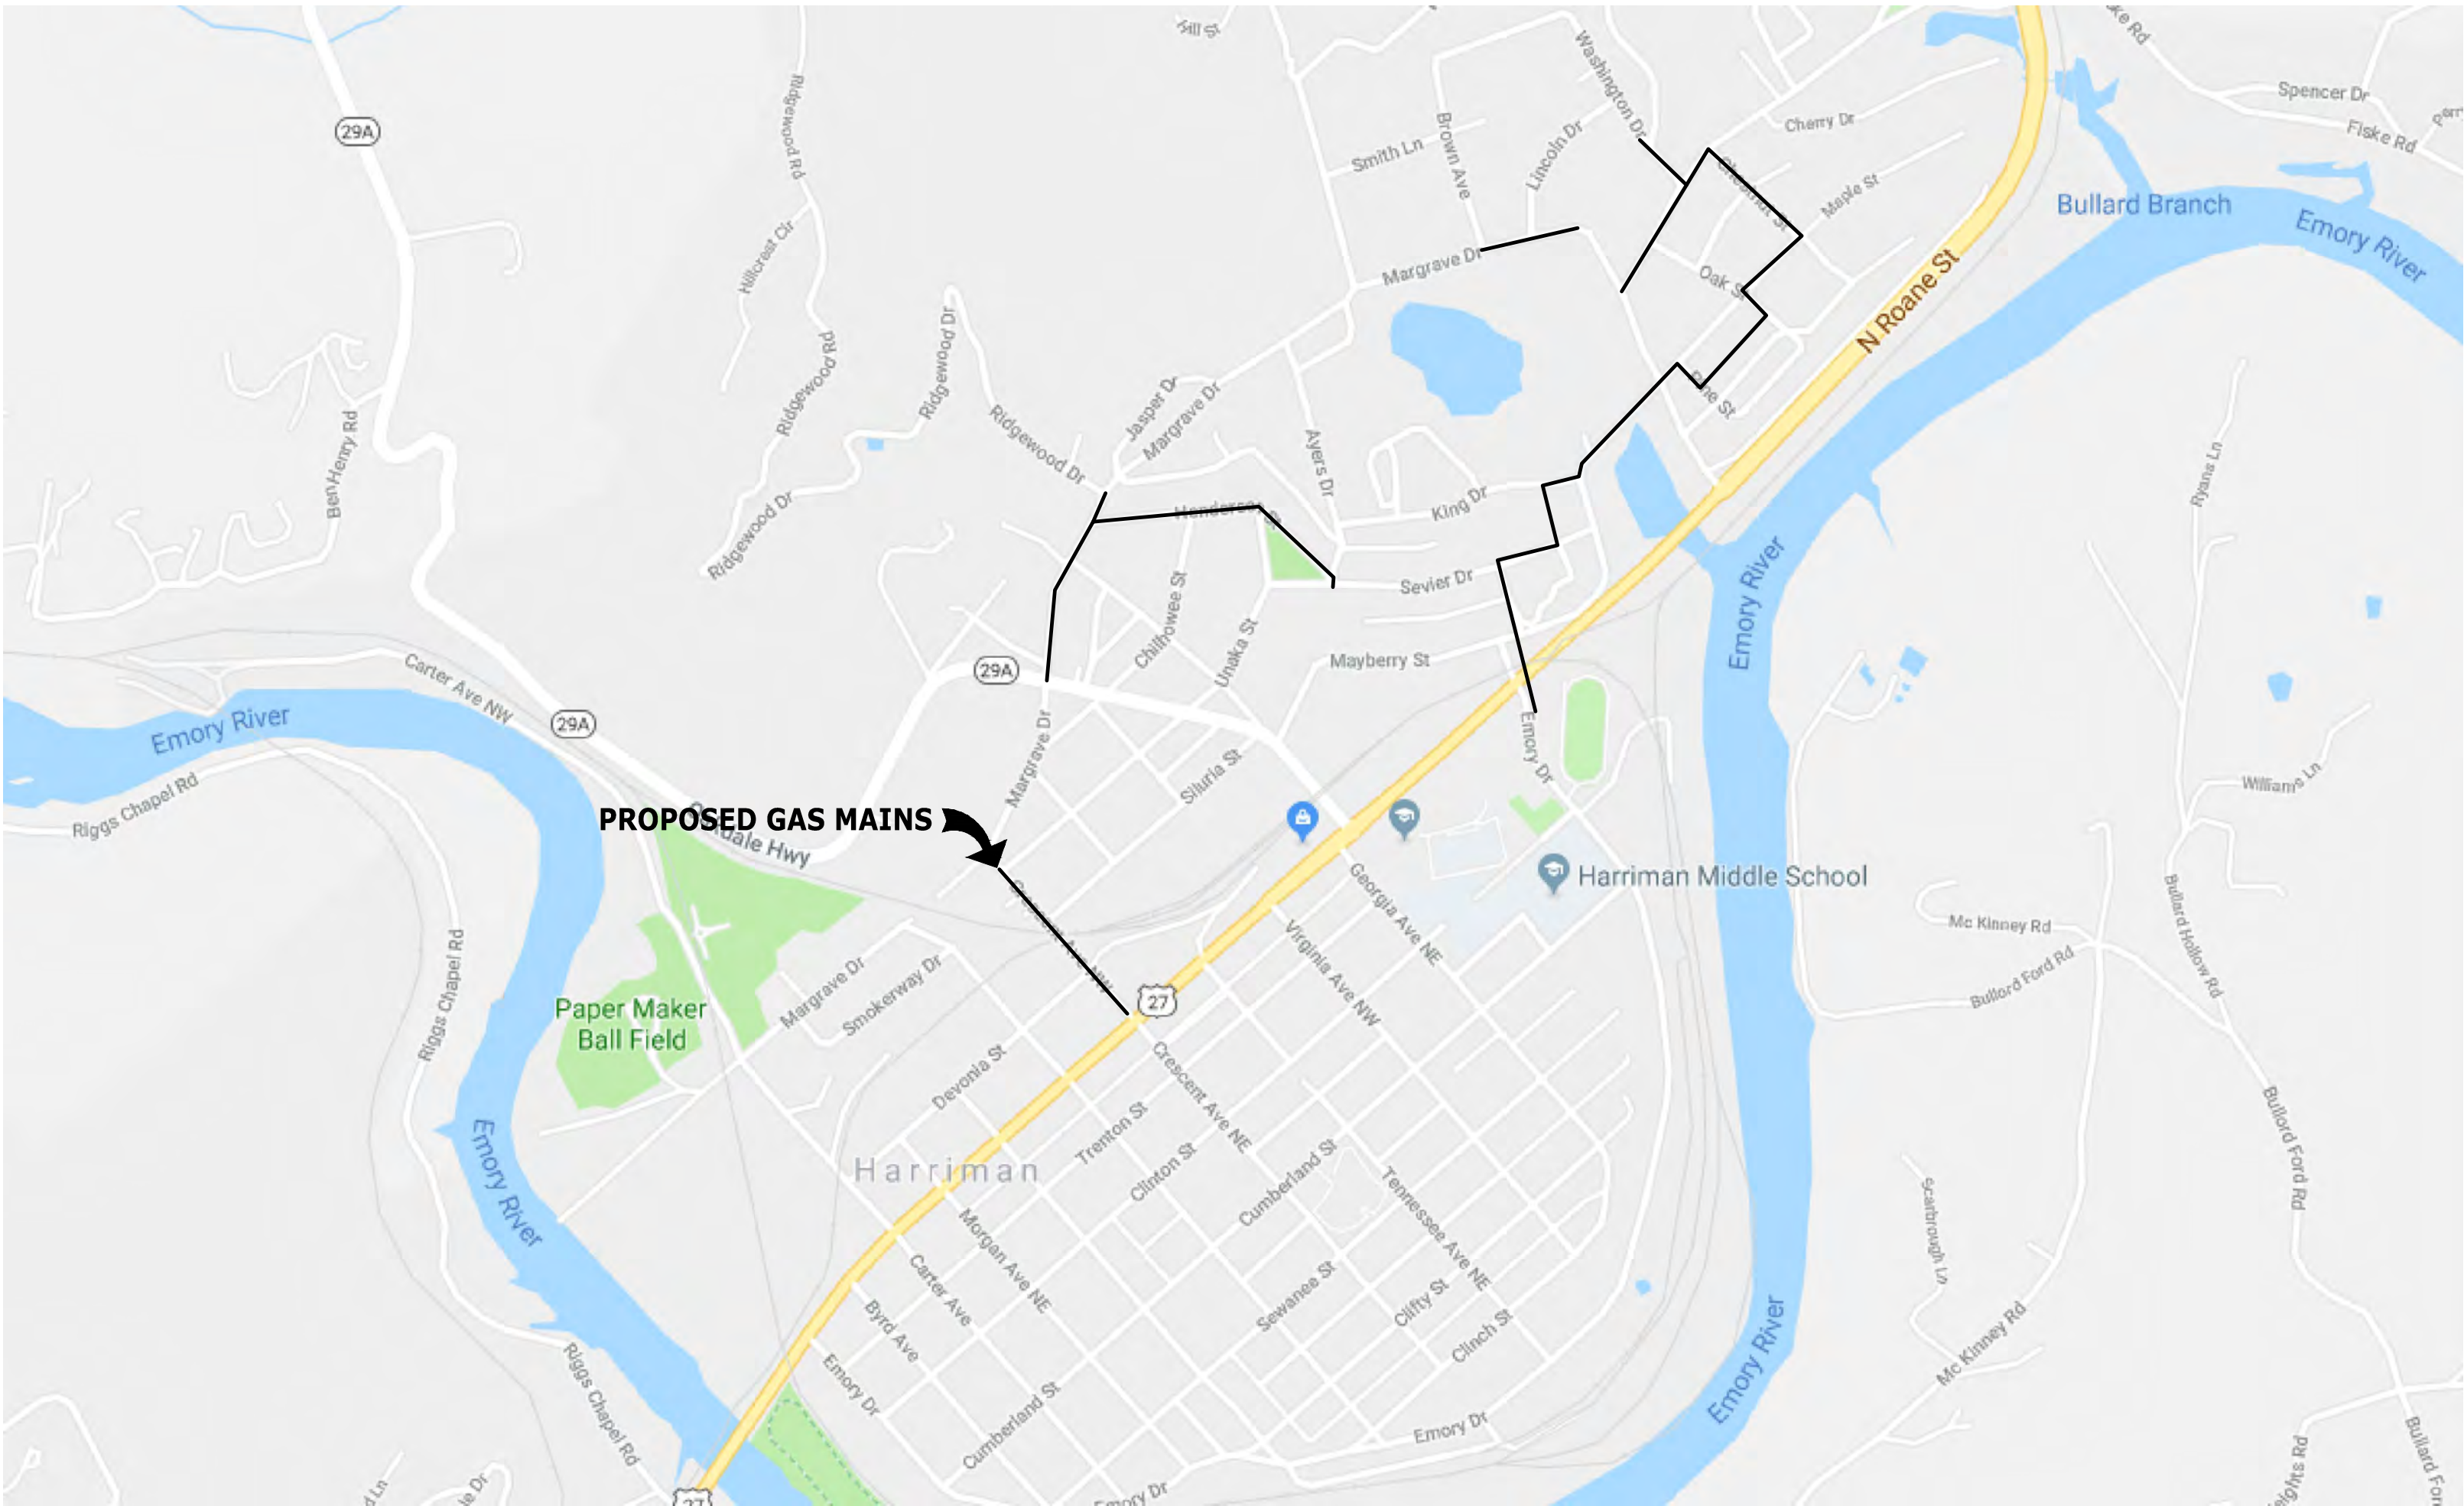

LOCATION MAP
NOT TO SCALE

INITIAL ISSUE FOR CONSTRUCTION		08/07/2019
REVISIONS		DATE
CANNON & CANNON INC CONSULTING ENGINEERS - FIELD SURVEYORS TEL 865.670.8555 8550 Kingston Pike WWW.CANNON-CANNON.COM Knoxville, TN 37919		
CLIENT: HARRIMAN UTILITY BOARD 200 NORTH ROANE STREET HARRIMAN, TN 37748 (865) 882-3242		
PROJECT: CAST IRON GAS MAIN REPLACEMENT PHASE III & IV HARRIMAN, TN		
COVER SHEET		
	CCI PROJECT NO. 00923-0010	
	DRAWING DATE AUGUST 7, 2019	
	PM WWL	QC SAF
	DRAWN WBW	PIC WHC
G0.01		

GENERAL NOTES

1. CONSTRUCTION MATERIALS AND INSTALLATION MUST MEET PROJECT SPECIFICATIONS. MATERIAL SUBMITTALS MUST BE APPROVED BY THE ENGINEER PRIOR TO CONSTRUCTION.
2. SUBMIT WELDERS QUALIFICATION STATEMENTS & CERTIFICATES TO THE ENGINEER PRIOR TO START OF CONSTRUCTION FOR EVERY WELDER THAT MAY WORK ON THIS PROJECT.
3. THE CONTRACTOR SHALL STAKE THE PROPOSED GAS MAIN LAYOUTS TO ALLOW AMPLE TIME FOR THE ENGINEER TO INSPECT THE LAYOUTS PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL CONTACT THE ENGINEER FOR INSPECTION AT LEAST FIVE (5) DAYS PRIOR TO START OF CONSTRUCTION.
4. ALL TIE-INS SHALL BE ACCOMPLISHED WITHOUT INTERRUPTION OF GAS SERVICE TO ANY CUSTOMER BY USING LINE STOPS AND/OR TEMPORARY BYPASSES AS SHOWN ON PLANS AND AS APPROVED BY THE ENGINEER.
5. COORDINATE TRAFFIC CONTROL AND TIE-INS AROUND HARRIMAN HIGH SCHOOL AND HARRIMAN MIDDLE SCHOOL WITH THE CITY OF HARRIMAN AND THE SCHOOL DISTRICT. NO GAS OUTAGES TO THE SCHOOLS WILL BE ALLOWED. CONTACT SCHOOL PRINCIPALS AND THE CITY MANAGER FOR COORDINATION.

CONTACT INFORMATION:


HIGH SCHOOL PRINCIPAL: SCOTT CALLAHAN (865) 882-1821
MIDDLE SCHOOL PRINCIPAL: LESLIE SMITH (865) 882-1727
CITY MANAGER: KEVIN HELMS (865) 882-9414

6. COORDINATE TRAFFIC CONTROL AND WORK IN N. ROANE STREET/ TN 61 WITH TDOT AND CITY OF HARRIMAN. COORDINATE ALL OTHER TRAFFIC CONTROL WITH CITY OF HARRIMAN. CONTACT CITY MANAGER KEVIN HELMS AT (865) 882-9414.
7. CONTRACTOR TO COORDINATE CONNECTIONS INTO EXISTING GAS MAINS WITH HUB'S GWS FOREMAN PRIOR TO MAKING TAPS. HUB APPROVAL REQUIRED PRIOR TO TAPS. CONTACT JEFF MIZE AT (865) 755-4173.
8. THE LOCATIONS OF THE EXISTING UTILITIES SHOWN ON THESE DRAWINGS ARE APPROXIMATE AND INCOMPLETE. THE EXACT LOCATIONS SHALL BE DETERMINED IN THE FIELD BY CONTACTING THE UTILITY COMPANIES INVOLVED AND POT-HOLING AS NECESSARY.
9. EXISTING GAS LINE DIAMETERS AND MATERIALS WERE OBTAINED FROM HISTORICAL RECORDS. CONTRACTOR SHALL VERIFY BY POT-HOLING PRIOR TO ORDERING MATERIAL FOR TIE-INS, CUT AND CAPS, ETC.
10. THE CONTRACTOR IS SOLELY RESPONSIBLE FOR POT-HOLING EXISTING UTILITIES TO DETERMINE ELEVATION AND LOCATION. POT-HOLING SHALL BE CONDUCTED WITH THE LEAST INTRUSIVE MEANS SUCH AS A VACTRON, HAND DIGGING, OR THE USE OF OTHER SIMILAR EQUIPMENT. PAVEMENT RESTORATION AT POT-HOLE LOCATIONS SHALL BE CONSIDERED INCIDENTAL TO THE WORK AND NO ADDITIONAL PAYMENT SHALL BE MADE.
11. PROVIDE ALL NECESSARY PROTECTIVE MEASURES TO SAFEGUARD THE EXISTING UTILITIES FROM DAMAGE DURING THE CONSTRUCTION OF THIS PROJECT. FURNISH ANY SPECIAL EQUIPMENT REQUIRED TO WORK OVER AND AROUND THE UTILITIES WITHOUT CAUSING THEM DAMAGE. IF DAMAGE DOES OCCUR, IMMEDIATELY NOTIFY UTILITY OWNER AND WORK TO RESTORE SERVICE. COST OF REPAIR OR REPLACEMENT OF DAMAGED LINES SHALL BE CONTRACTOR'S RESPONSIBILITY.
12. PRIOR TO COMMENCING WORK, THE CONTRACTOR SHALL CONTACT THE UTILITY OWNERS TO NOTIFY THEM OF WORK IN THE AREA AND REQUEST THEM TO PROPERLY LOCATE THEIR RESPECTIVE UTILITY. NOTIFICATION SHALL BE GIVEN AT LEAST THREE BUSINESS DAYS PRIOR TO COMMENCEMENT OF OPERATIONS AROUND THE UTILITY.
13. UTILITIES SHALL BE LOCATED BY CALLING THE TENNESSEE ONE CALL SYSTEM, AT 811.
14. TRENCH DESIGN AND SAFETY FOR PIPELINE CONSTRUCTION IS SOLELY THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL CONFORM WITH ALL APPLICABLE LOCAL, STATE, AND OSHA REGULATIONS.
15. STONE BEDDING AND BACKFILL SHALL BE INSTALLED IN STRICT COMPLIANCE WITH THE PROJECT SPECIFICATIONS.
16. ALL GAS LINES AND APPURTENANCES SHALL BE INSTALLED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS.
17. CONTRACTOR TO COORDINATE FIELD LOCATIONS OF GAS SERVICES AND METERS WITH RESIDENT PROJECT REPRESENTATIVE.
18. VALVES AND METER ASSEMBLIES SHALL BE ORIENTED SO AS TO ASSURE GAS LINE APPURTENANCES ARE NOT LOCATED WITHIN SIDEWALK AND/OR CURB/CURB & GUTTER AREAS, UNLESS OTHERWISE APPROVED BY HUB.
19. CONTRACTOR SHALL INSTALL DETECTION WIRE WITH CONNECTORS AND WARNING TAPE PER PROJECT SPECIFICATIONS.
20. GAS MAIN MIN. COVER SHALL BE 30" AND MAX. COVER SHALL BE 48", UNLESS OTHERWISE APPROVED IN WRITING BY HUB.
21. ALL CITY STREETS WITH OPEN CUT EXCAVATION ARE TO BE MILLED AND OVERLAYED FOR THE FULL WIDTH OF THE ROAD ALONG THE TRENCH LENGTH. TEMPORARY PAVEMENT REPAIR SHALL BE INSTALLED BETWEEN EXCAVATION AND OVERLAY.
22. PAVEMENT SHALL BE SAW CUT IN RECTANGULAR SECTIONS WITH NEAT SQUARED EDGES.
23. BACKFILL IN PAVED AREAS SHALL BE COMPACTED IN MAXIMUM 6" LIFTS USING "JUMPING JACK" STYLE COMPACTOR.
24. ALL INCIDENTAL WORK, INCLUDING LABOR AND MATERIALS, NECESSARY TO COMPLETE THE PROJECT AS SHOWN IN THE CONTRACT DOCUMENTS, FOR WHICH A SEPARATE PAY ITEM IS NOT SHOWN SHALL BE PERFORMED BY THE CONTRACTOR AT NO ADDITIONAL COST TO HUB. THE COSTS FOR THIS WORK SHALL BE MERGED INTO THE UNIT PRICES FOR OTHER BID ITEMS.
25. BEFORE BEGINNING WORK ON ANY NEW PROPERTY, THE CONTRACTOR SHALL TAKE PHOTOS AND/OR VIDEO IN ORDER TO PROPERLY DOCUMENT PRE-CONSTRUCTION CONDITION OF THE SITE. THE SAID PHOTOS OR VIDEO SHALL BE SUBMITTED TO THE ENGINEER ALONG WITH PROPERTY RESTORATION RELEASE FORM BEFORE PAYMENT WILL BE MADE FOR PROPERTY RESTORATION. CONTRACTOR SHALL NOT BACKFILL ANY PART OF THE WORK (INCLUDING CONDEMNED SERVICE LINE) BEFORE THE RESIDENT PROJECT REPRESENTATIVE HAS VIEWED IT IN PERSON.
26. THE CONTRACTOR MUST MEET ALL NECESSARY REQUIREMENTS OF CFR 49 PART 192, SUBPARTS E AND N RELATED TO NATURAL GAS WORK INCLUDING BUT NOT LIMITED TO DRUG AND ALCOHOL TESTING, OPERATOR QUALIFICATION, FUSION QUALIFICATION, WELDER CERTIFICATION, ETC. AS A PREREQUISITE REQUIREMENT TO HUB EXECUTING A CONTRACT, THE CONTRACTOR SHALL FURNISH A LIST OF CREW MEMBERS THAT WILL BE SPECIFICALLY ASSIGNED TO THE WORK AND EVIDENCE OF THEIR QUALIFICATIONS UNDER THE REQUIRED PROGRAMS. UNQUALIFIED CREW MEMBERS WILL BE QUALIFIED OR REPLACED AT THE EXPENSE OF THE CONTRACTOR. THE CONTRACTOR MAY BE SUBJECT TO PENALTIES THAT COULD INCLUDE TERMINATION OF THE CONTRACT AS DETERMINED BY HUB FOR HAVING CREW MEMBERS PERFORMING TASKS FOR WHICH THEY ARE NOT QUALIFIED TO PERFORM.

26. IN ORDER FOR THE MOST CURRENT OPERATOR QUALIFICATION STATUS CHECKS OF CONTRACTOR OR CONTRACTOR EMPLOYEES TO BE PERFORMED, THE CONTRACTOR MUST COMPLY WITH 49 CFR PART 192, SUBPART N USING ONE OF THE TWO OPTIONS LISTED BELOW:
- 26.1. USE HIS OR HER OWN OPERATOR QUALIFICATION PLAN THAT HAS BEEN APPROVED BY HUB OR
- 26.2. USE A THIRD-PARTY OPERATOR QUALIFICATION PLAN THAT HAS BEEN APPROVED BY HUB.
27. THE CONTRACTOR SHALL HAVE ALL DOCUMENTATION DEMONSTRATING THAT PERSONNEL PERFORMING COVERED OQ TASKS ARE QUALIFIED TO PERFORM SUCH TASKS AND HAVE THAT DOCUMENTATION ELECTRONICALLY ACCESSIBLE BY HUB WITHIN 5 BUSINESS DAYS AFTER REQUEST BY HUB. HUB MAY CONSIDER THE CONTRACTOR IN DEFAULT IF THIS DOCUMENTATION IS NOT RECEIVED OR ELECTRONICALLY AVAILABLE WITHIN 5 BUSINESS DAYS AFTER THE REQUEST BY HUB.
28. CONTRACTOR WILL BE REQUIRED TO HAVE THE FOLLOWING SAFETY EQUIPMENT ON-SITE AS THE WORK IS PERFORMED.
- 28.1. FIRE EXTINGUISHER – CONTRACTORS WILL NEED TO POSSESS A 10-LB "PURPLE K" BC TYPE OR GREATER EXTINGUISHER.
- 28.2. A FIRE HOOD(S) FOR ALL PERSONNEL WORKING IN LIVE GAS WILL NEED TO PROVIDE COVERAGE FOR HEAD, FACE AND NECK AND BE CLASSIFIED AS FIRE RESISTANT.
- 28.3. A FIRE SUIT(S) FOR ALL PERSONNEL WORKING DIRECTLY IN LIVE GAS WILL NEED TO BE – INSULATED FLAME RESISTANT ONE PIECE COVERALL.
29. EACH CONTRACTOR EMPLOYEE, PERFORMING OR PARTICIPATING IN THE PERFORMANCE OF A COVERED TASK, SHALL ADHERE TO THE FOLLOWING GUIDELINES FOR FIRE RETARDANT CLOTHING WHEN WORKING IN CONDITIONS AS STATED BELOW:
- 29.1. INITIAL EXCAVATION ACTIVITIES – 100% COTTON UNDERWEAR, COTTON SOCKS, COTTON SHIRT, COTTON PANTS, LEATHER WORK BOOTS + APPROPRIATE PPE FOR TASK.
- 29.2. HAND EXCAVATION OF SERVICE TEE – 100% COTTON UNDERWEAR, COTTON SOCKS, COTTON SHIRT, COTTON PANTS, LEATHER WORK BOOTS + APPROPRIATE PPE FOR TASK.
- 29.3. SQUEEZE OFF OF PIPELINE – 100% COTTON CLOTHING PLUS HOODED FLAME RESISTANT 1 PIECE COVERALL, FLAME RESISTANT HEAD SOCK, + APPROPRIATE PPE FOR TASK.
- 29.4. BLOWING GAS ENVIRONMENT – 100% COTTON CLOTHING PLUS HOODED INSULATED FLAME RESISTANT ONCE PIECE COVERALL, FLAME RESISTANT HEAD SOCK AND LEATHER GLOVES.
30. CONTRACTOR SHALL COMPLETE BTU LOAD FORM (SECTION 33 51 15) FOR EACH SERVICE TO BE REPLACED OR OTHERWISE INSTALLED NEW. SUBMIT FORM TO ENGINEER. HUB WILL SIZE EFV FOR EACH SERVICE. CONTRACTOR TO PROVIDE AND INSTALL EACH EFV.
31. ALL STEEL GAS MAIN SHALL BE WELDED. FLANGES WILL NOT BE ALLOWED. WHERE CONNECTING TO EXISTING FLANGED VALVES, CONTRACTOR SHALL USE WELD NECK FLANGES.
32. GAS MAIN AND SERVICE LINE INSTALLATION SHALL BE OPEN CUT UNLESS SPECIFICALLY SHOWN OTHERWISE ON PLANS OR APPROVED IN WRITING BY ENGINEER. IN GENERAL, MAIN AND SERVICE LINE INSTALLATION IN ALLEYS AND CITY STREETS NEAR OTHER UTILITIES WILL BE BY OPEN CUT AND TRENCHLESS INSTALLATION WILL NOT BE APPROVED IN THESE AREAS.
33. TRACER WIRE SHALL PASS CONTINUITY TEST BY HUB PERSONNEL PRIOR TO PATCHING ASPHALT. TEST WILL CHECK FOR CONTINUITY OF SIGNAL ALONG MAIN, BETWEEN MAIN AND SERVICES, AND ALONG SERVICES. CONTACT JEFF MIZE OF HUB AT (865) 755-4173 FOR TESTING 72 HOURS PRIOR TO PATCHING.

LEGEND

- PROPOSED GAS MAIN
- PROPOSED GAS SERVICE
- EXISTING GAS TO REMAIN
- EXISTING GAS TO BE ABANDONED
- EXISTING WATER
- EXISTING WATER VALVE
- EXISTING SANITARY SEWER
- EXISTING SEWER MANHOLE
- EXISTING PROPERTY LINE
- EXISTING GAS METER
- EXISTING GAS VALVE
- EXISTING GAS MARKER
- EXISTING POWER MANHOLE
- EXISTING TELEPHONE/COMM. MANHOLE
- EXISTING STORM SEWER
- EXISTING STORM CATCHBASIN
- EXISTING LIGHT POLE
- EXISTING POWER POLE
- SURVEY CONTROL POINT
- EXISTING FENCE
- EXISTING BUILDING
- PROPOSED GAS VALVE
- PROPOSED TRANSITION COUPLING
- PROPOSED REDUCER
- PROPOSED LINE STOP

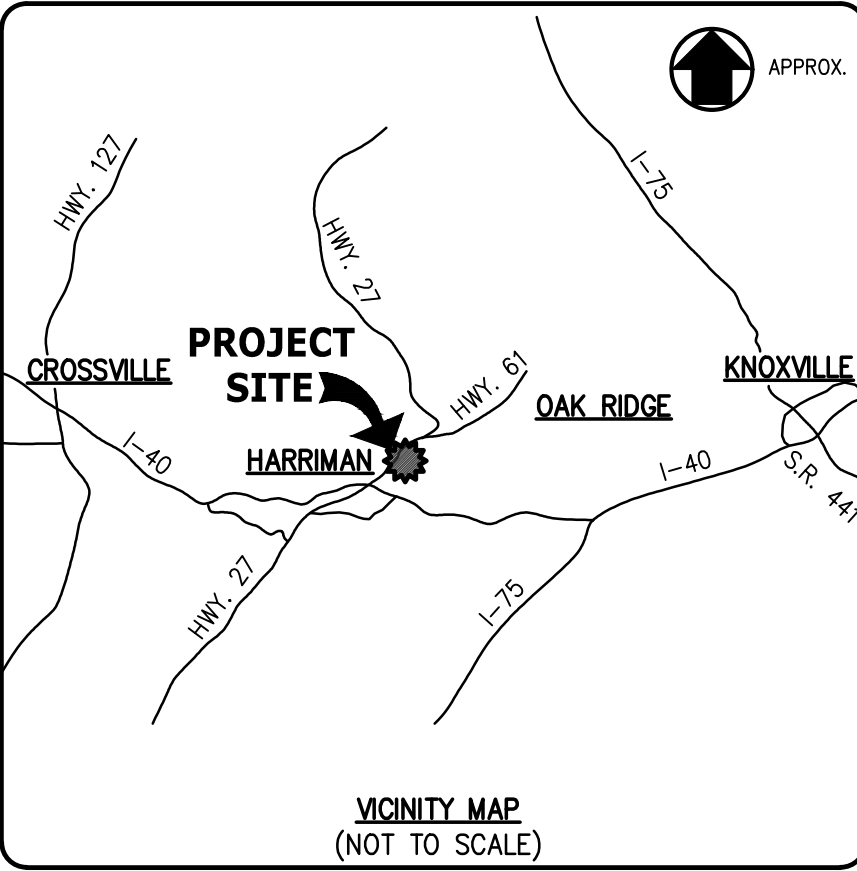

Δ INITIAL ISSUE FOR CONSTRUCTION	08/07/2019
REVISIONS	DATE
CANNON & CANNON INC CONSULTING ENGINEERS · FIELD SURVEYORS TEL 865.670.8555 8550 Kingston Pike WWW.CANNON-CANNON.COM Knoxville, TN 37919	
CLIENT:	HARRIMAN UTILITY BOARD 200 NORTH ROANE STREET HARRIMAN, TN 37748 (865) 882-3242
PROJECT:	CAST IRON GAS MAIN REPLACEMENT PHASE III & IV HARRIMAN, TN







GENERAL NOTES AND LEGEND



CCI PROJECT NO.	00923-0010
DRAWING DATE	AUGUST 7, 2019
PM WWL	QC SAF
DRAWN WBW	PIC WHC

G0.03




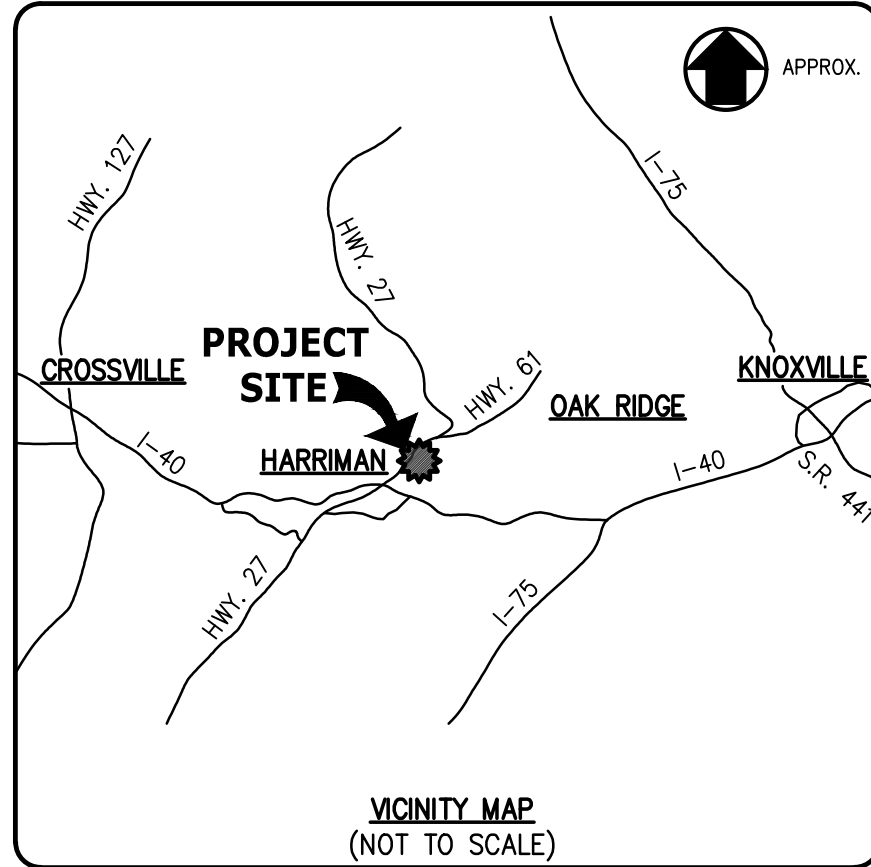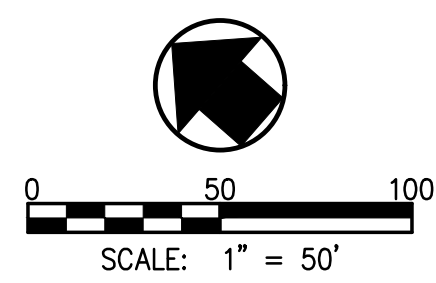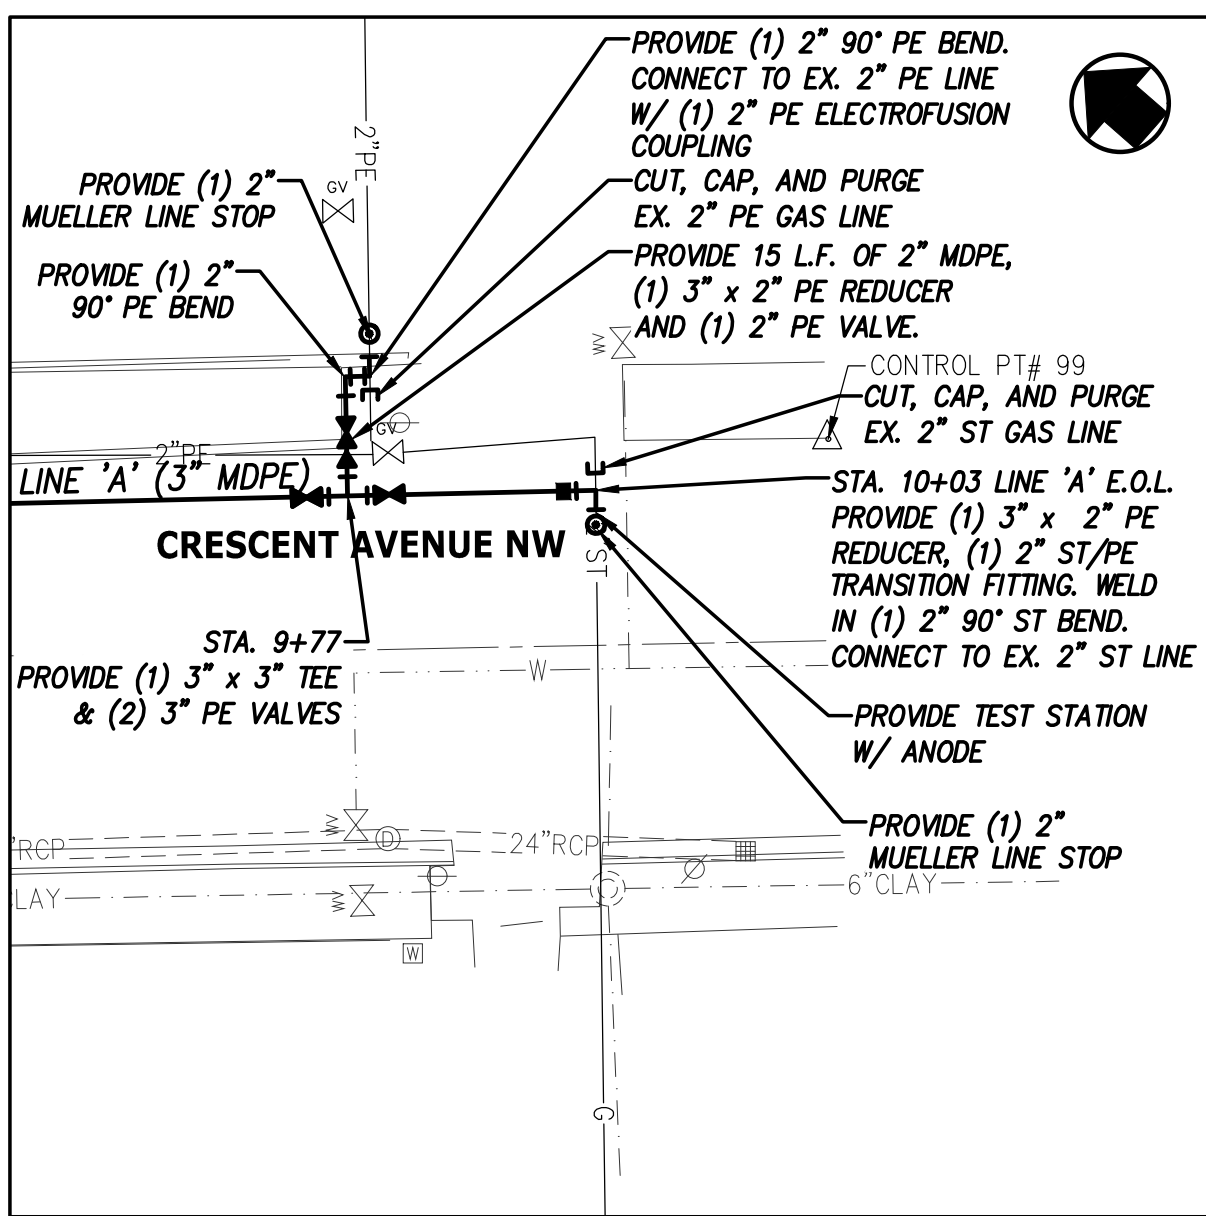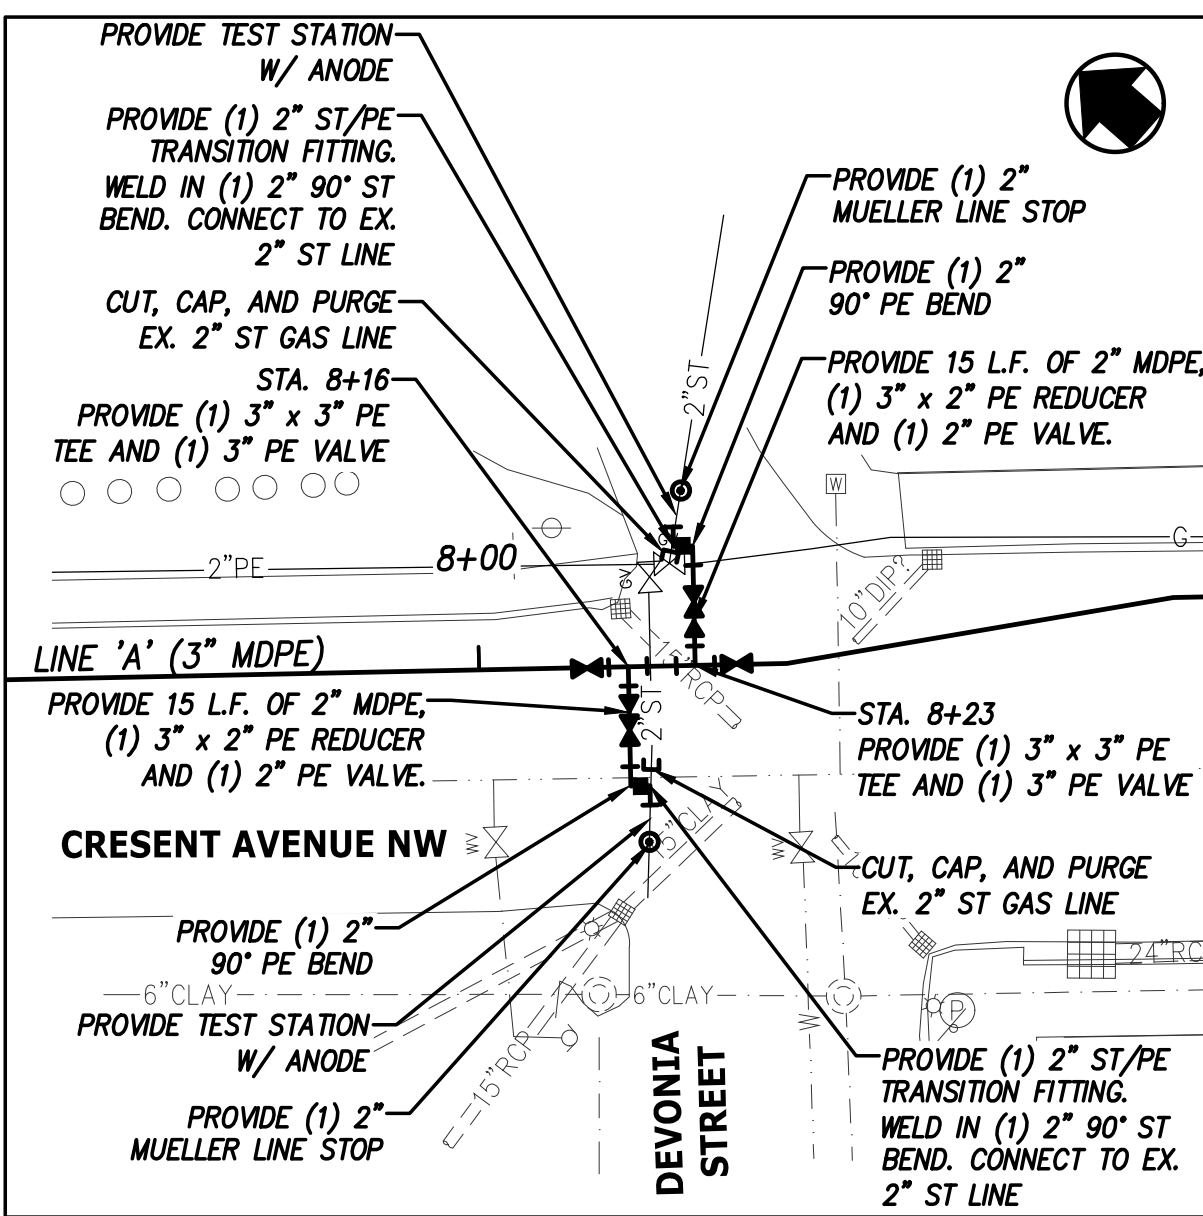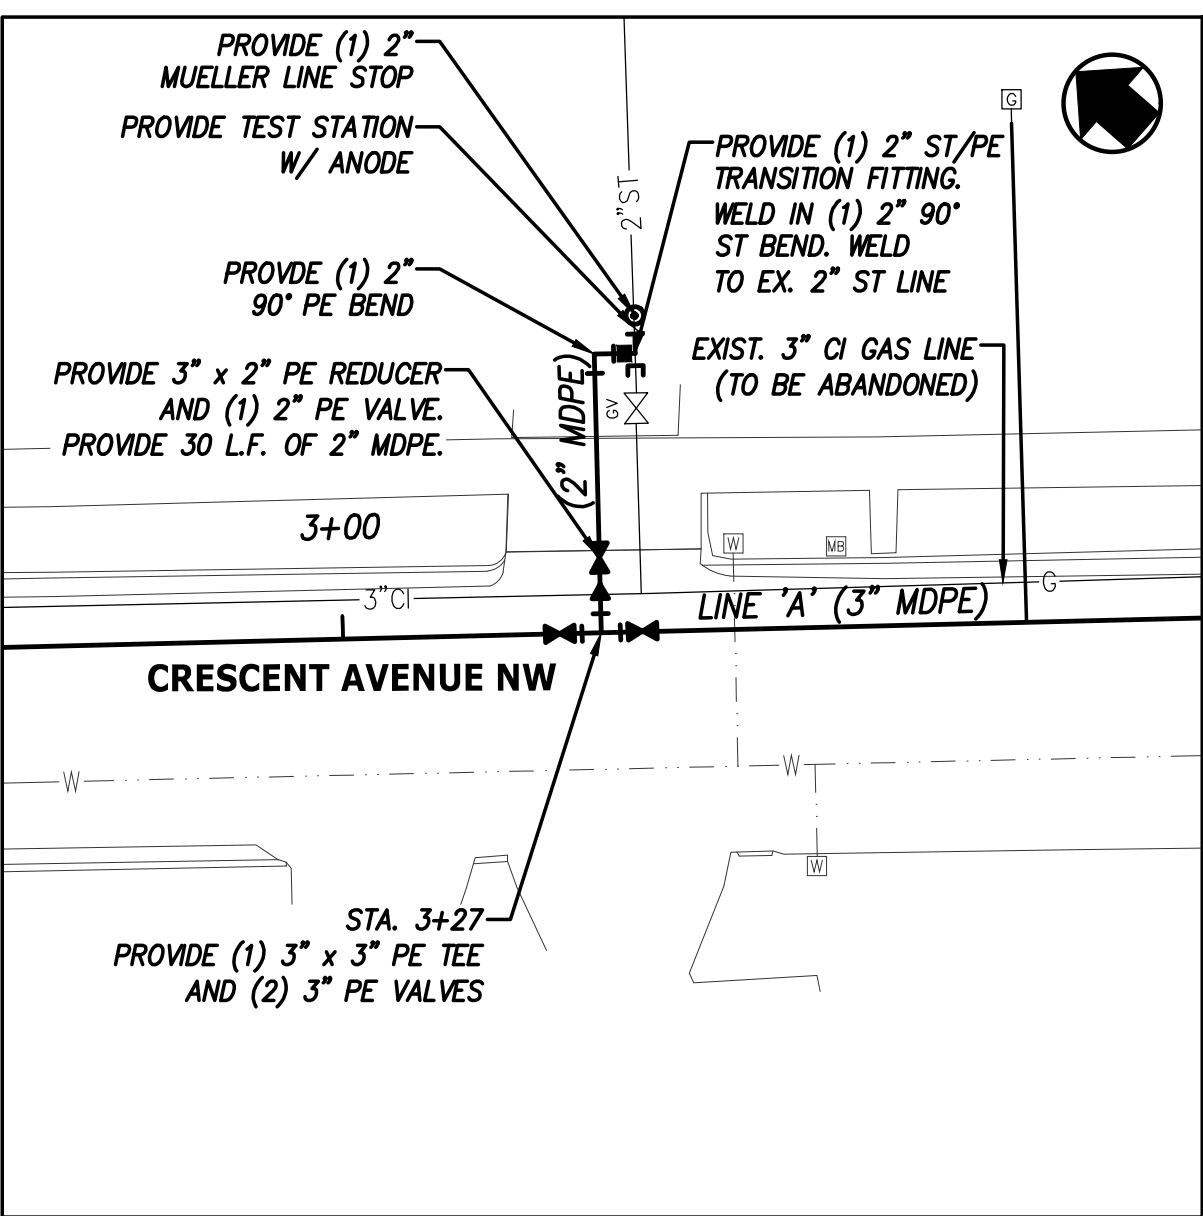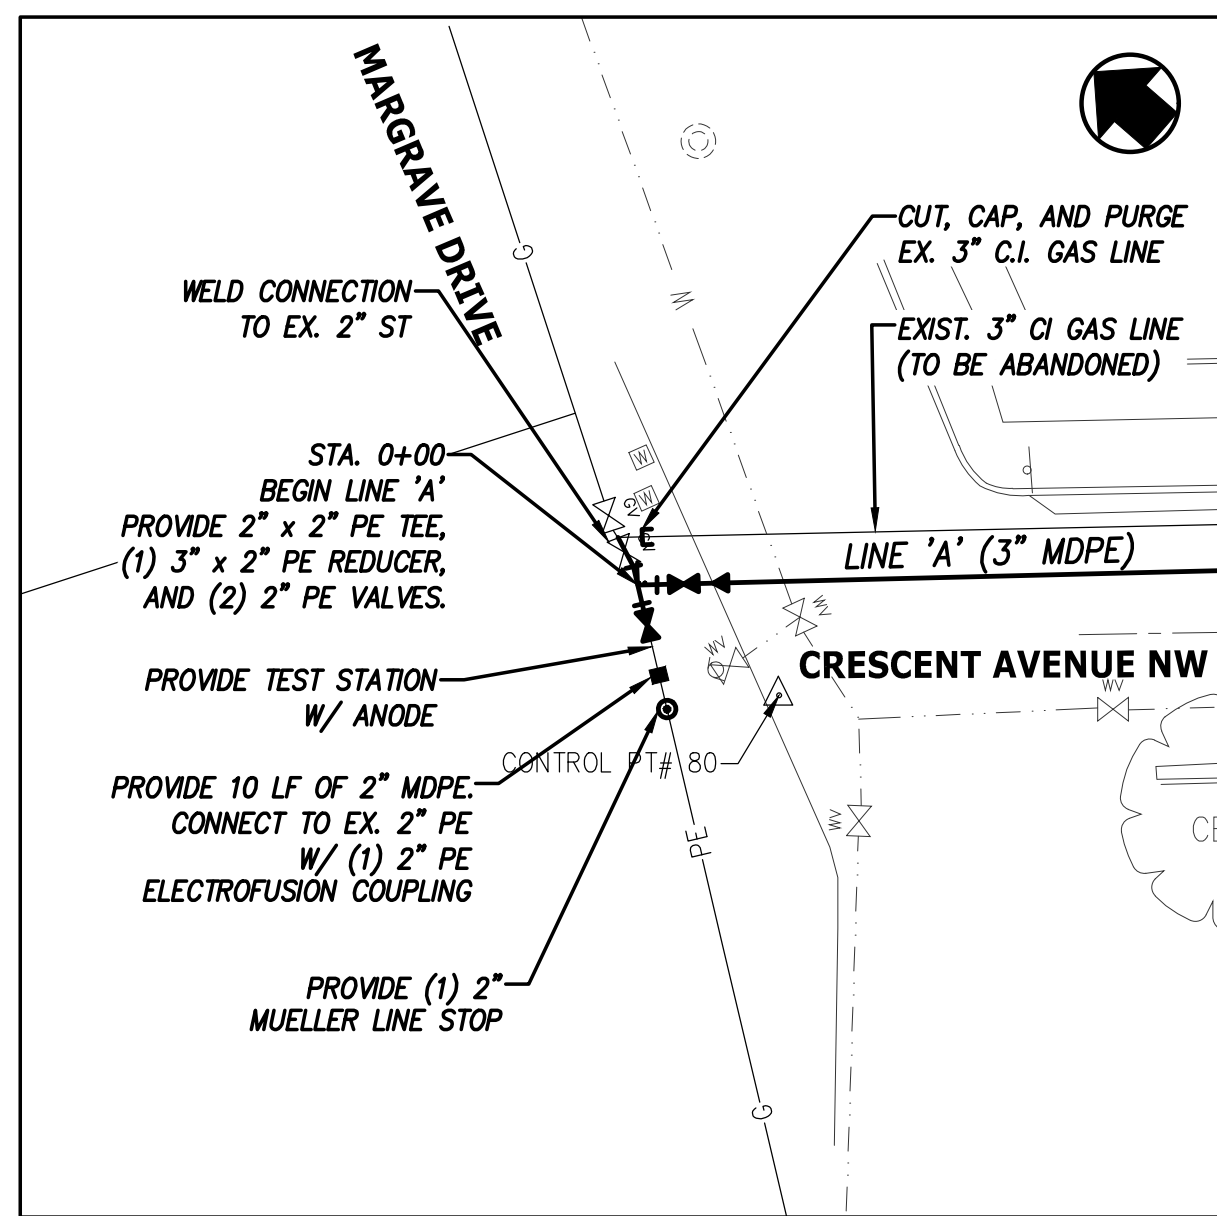

LEGEND



—	PROPOSED GAS MAIN
—	PROPOSED GAS SERVICE
— G —	EXISTING GAS TO REMAIN
- - - G - - -	EXISTING GAS TO BE ABANDONED
— W —	EXISTING WATER
— SA —	EXISTING SANITARY SEWER
—	EXISTING SEWER MANHOLE
—	EXISTING PROPERTY LINE
—	EXISTING GAS METER
—	EXISTING GAS VALVE
—	EXISTING GAS MARKER
—	EXISTING POWER MANHOLE
—	EXISTING TELEPHONE/COMM. M.H.
— ST —	EXISTING STORM SEWER
—	EXISTING STORM CATCHBASIN
—	EXISTING LIGHT POLE
—	EXISTING POWER POLE
—	SURVEY CONTROL POINT
—	EXISTING FENCE
—	EXISTING BUILDING
—	PROPOSED GAS VALVE
—	PROPOSED TRANSITION COUPLING
—	PROPOSED REDUCER
—	PROPOSED LINE STOP

- CASING AND VENT NOTES**
- REFER TO RR PERMIT FOR BORE AND CASING DETAILS.
 - SEALED CASINGS FOR FLAMMABLE SUBSTANCES SHALL BE PROPERLY VENTED. VENT PIPE SHALL BE OF SUFFICIENT DIAMETER, BUT IN NO CASE LESS THAN TWO INCHES (51MM) IN DIAMETER, AND SHALL BE ATTACHED NEAR EACH END OF THE CASING AND PROJECT THROUGH THE GROUND SURFACE AT R.O.W. VENT PIPES SHALL EXTEND NOT LESS THAN 4 FEET ABOVE GROUND SURFACE. TOP OF VENT PIPE SHALL HAVE A DOWN-TURNED ELBOW, PROPERLY SCREENED, OR A RELIEF VALVE.
 - VENT PIPES SHALL BE AT LEAST 4 FEET VERTICALLY FROM AERIAL ELECTRIC WIRES.
 - WHEN PIPELINE IS IN A PUBLIC HIGHWAY, STREET-TYPE VENTS SHALL BE INSTALLED.

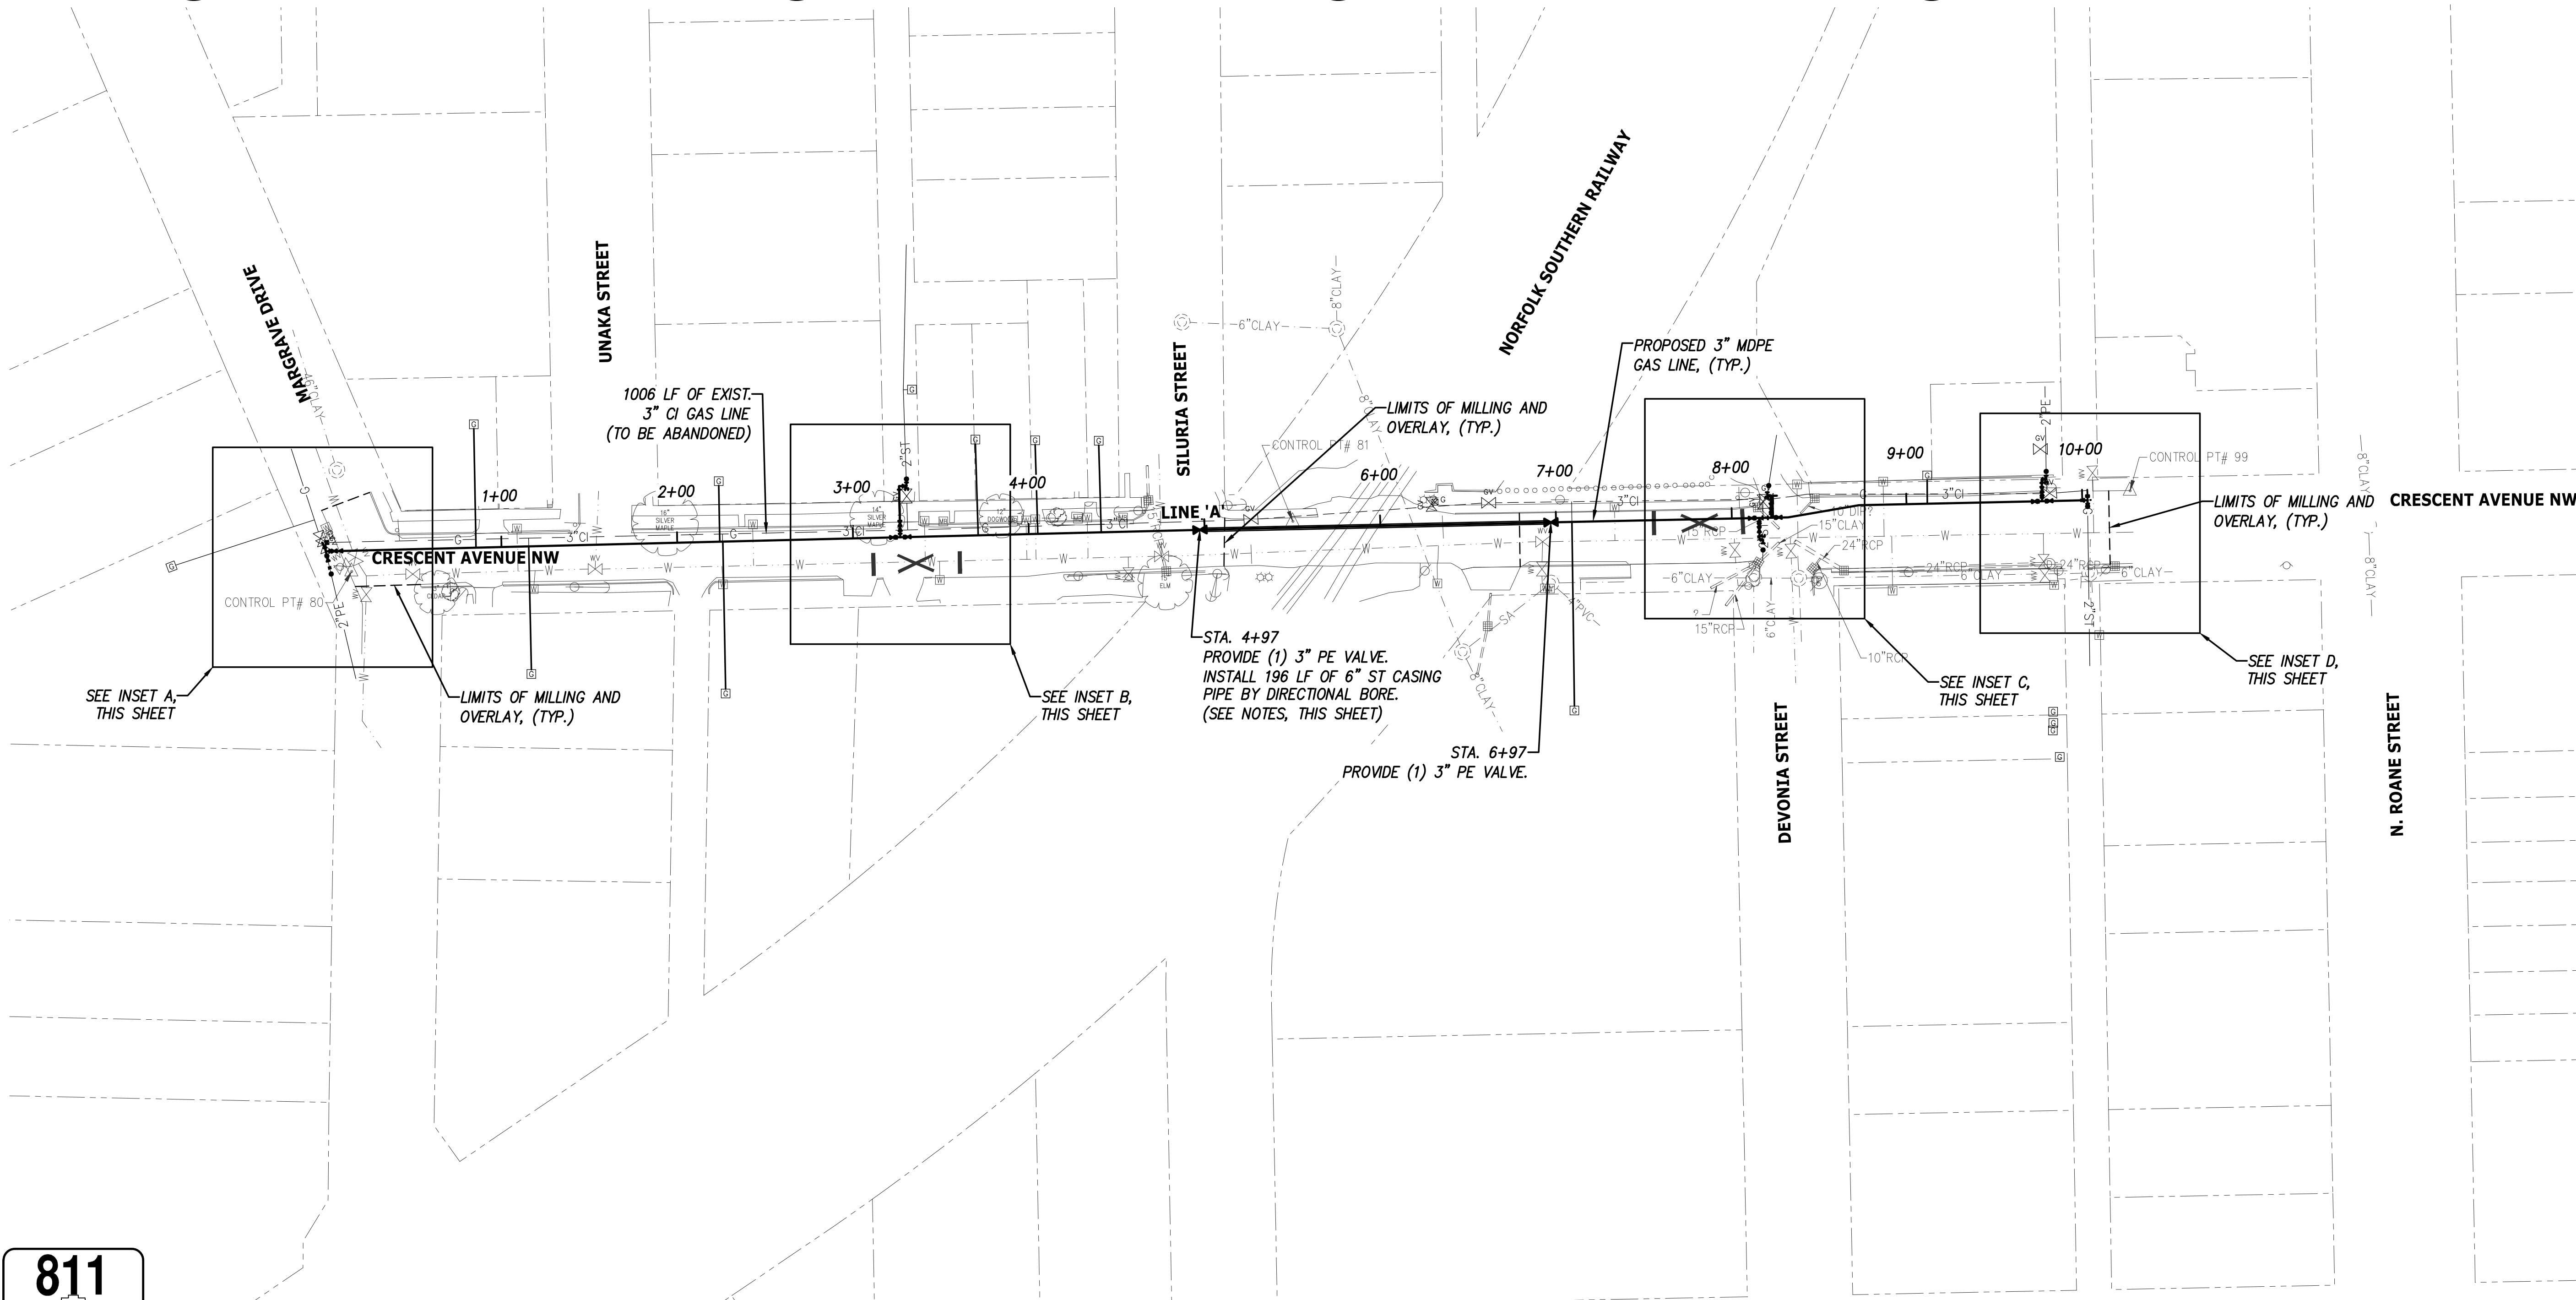


PLAN

INITIAL ISSUE FOR CONSTRUCTION	08/07/2019
REVISIONS	DATE
CANNON & CANNON INC CONSULTING ENGINEERS - FIELD SURVEYORS TEL 865.670.8555 8550 Kingston Pike WWW.CANNON-CANNON.COM Knoxville, TN 37919	
CLIENT:	HARRIMAN UTILITY BOARD 200 NORTH ROANE STREET HARRIMAN, TN 37748 (865) 882-3242
PROJECT:	CAST IRON GAS MAIN REPLACEMENT PHASE III & IV HARRIMAN, TN
GAS LINE PLAN	
	CCI PROJECT NO. 90923-0010
	DRAWING DATE AUGUST 7, 2019
	PM WWL QC SAF
	DRAWN WBW PIC WHC
G1.01	

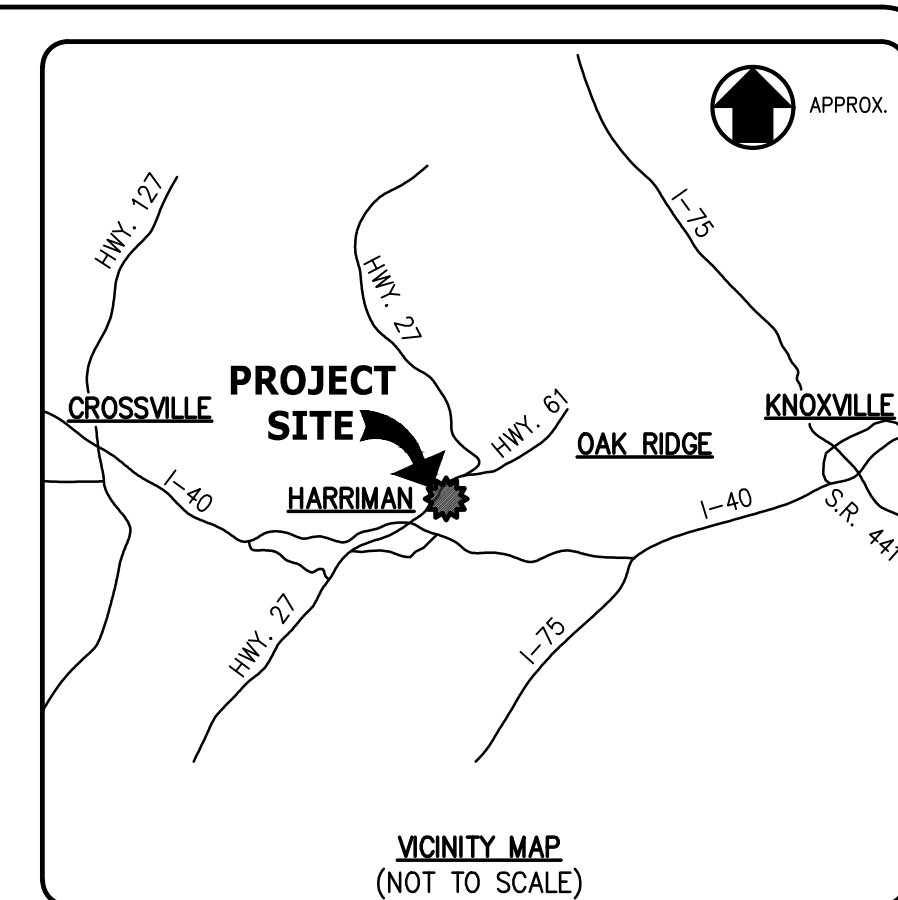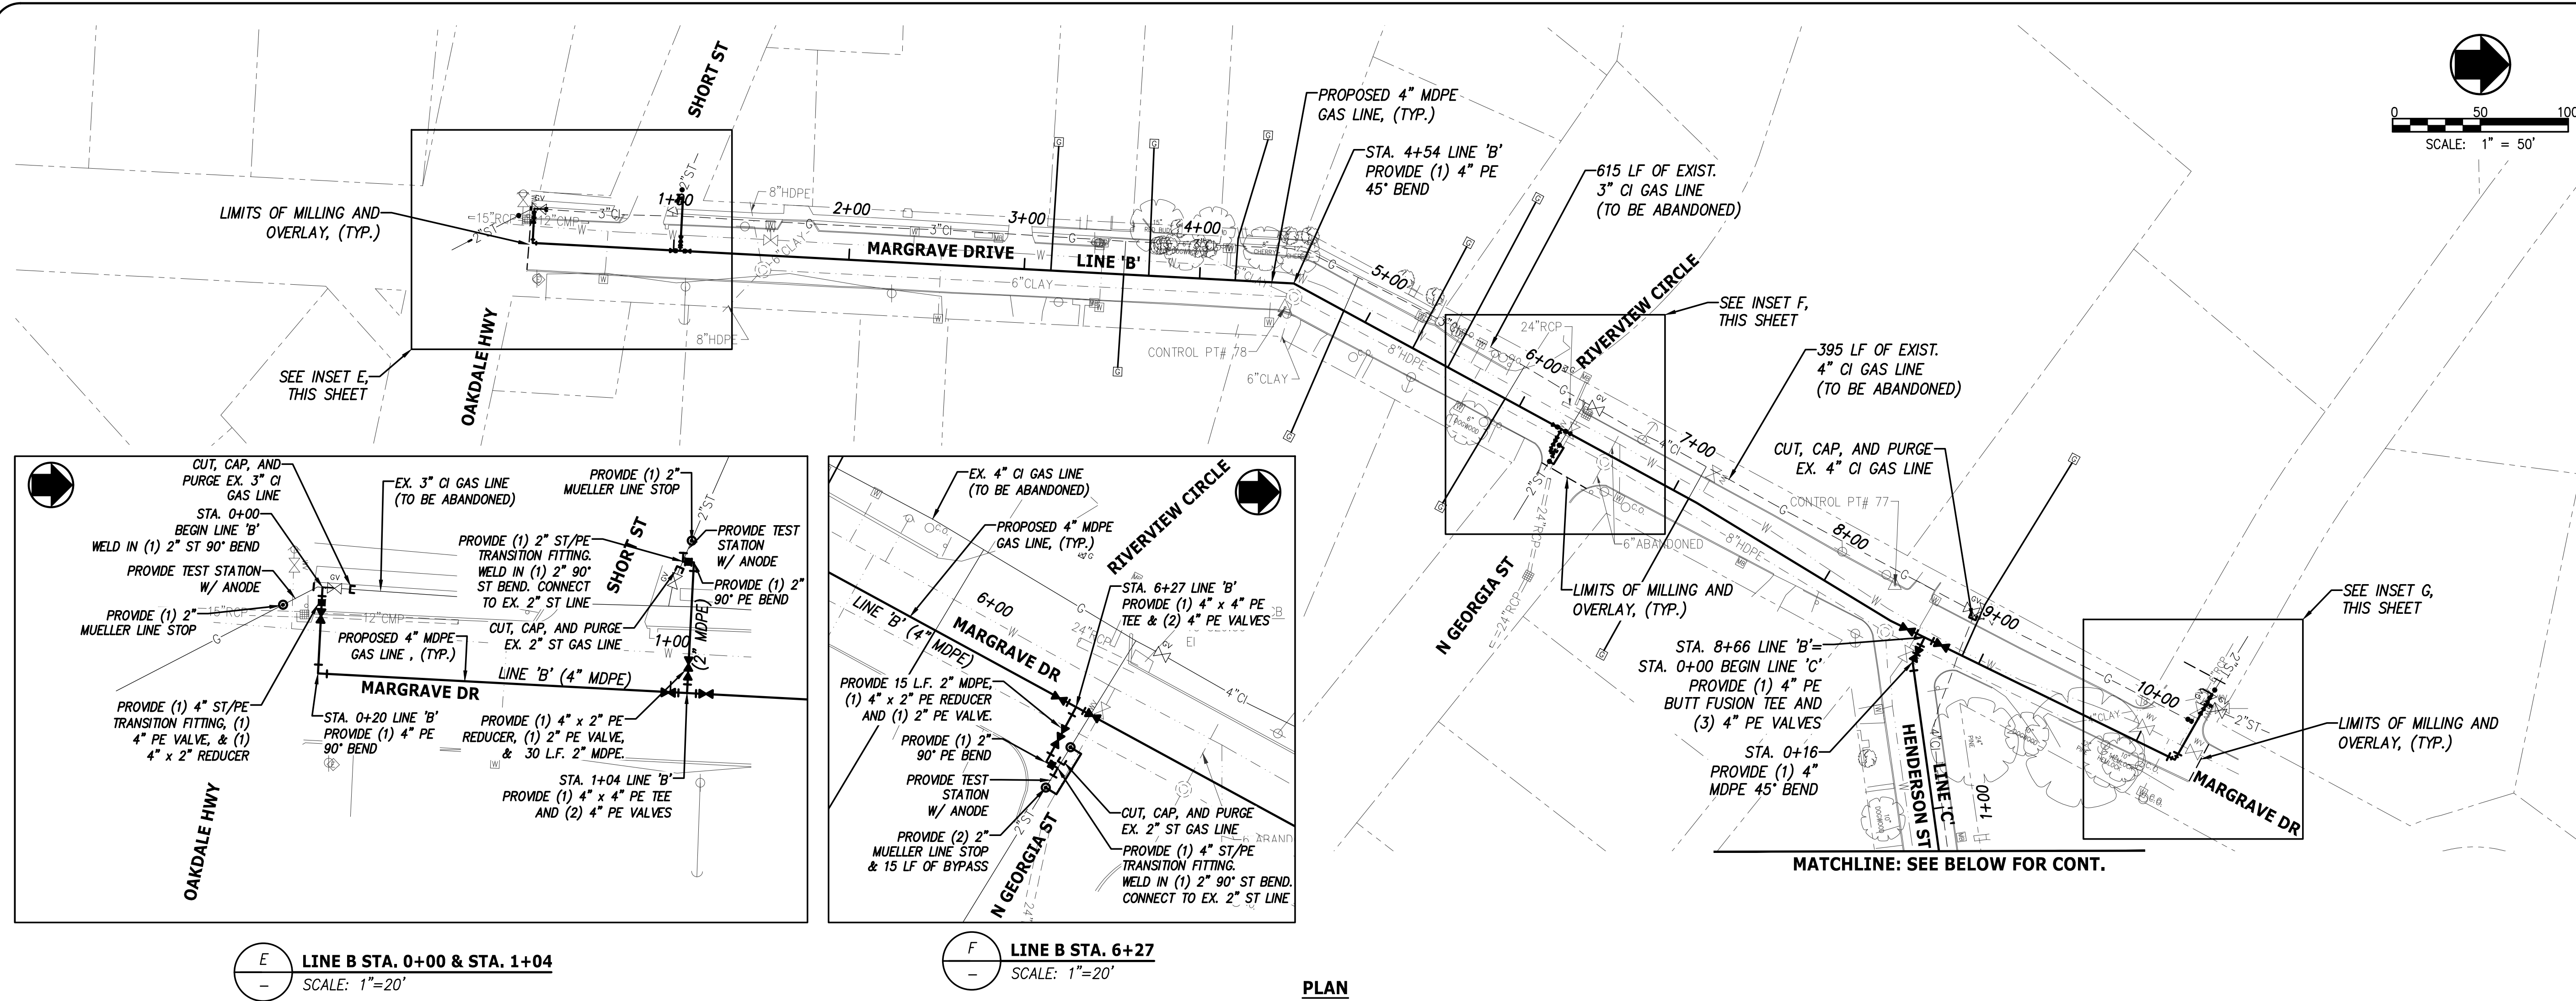

LEGEND	
	PROPOSED GAS MAIN
	PROPOSED GAS SERVICE
	EXISTING GAS TO REMAIN
	EXISTING GAS TO BE ABANDONED
	EXISTING WATER
	EXISTING WATER VALVE
	EXISTING SANITARY SEWER
	EXISTING SEWER MANHOLE
	EXISTING PROPERTY LINE
	EXISTING GAS METER
	EXISTING GAS VALVE
	EXISTING POWER MANHOLE
	EXISTING TELEPHONE/COMM. M.H.
	EXISTING STORM SEWER
	EXISTING STORM CATCHBASIN
	EXISTING LIGHT POLE
	EXISTING POWER POLE
	SURVEY CONTROL POINT
	EXISTING FENCE
	EXISTING BUILDING
	PROPOSED GAS VALVE
	PROPOSED TRANSITION COUPLING
	PROPOSED REDUCER
	PROPOSED LINE STOP

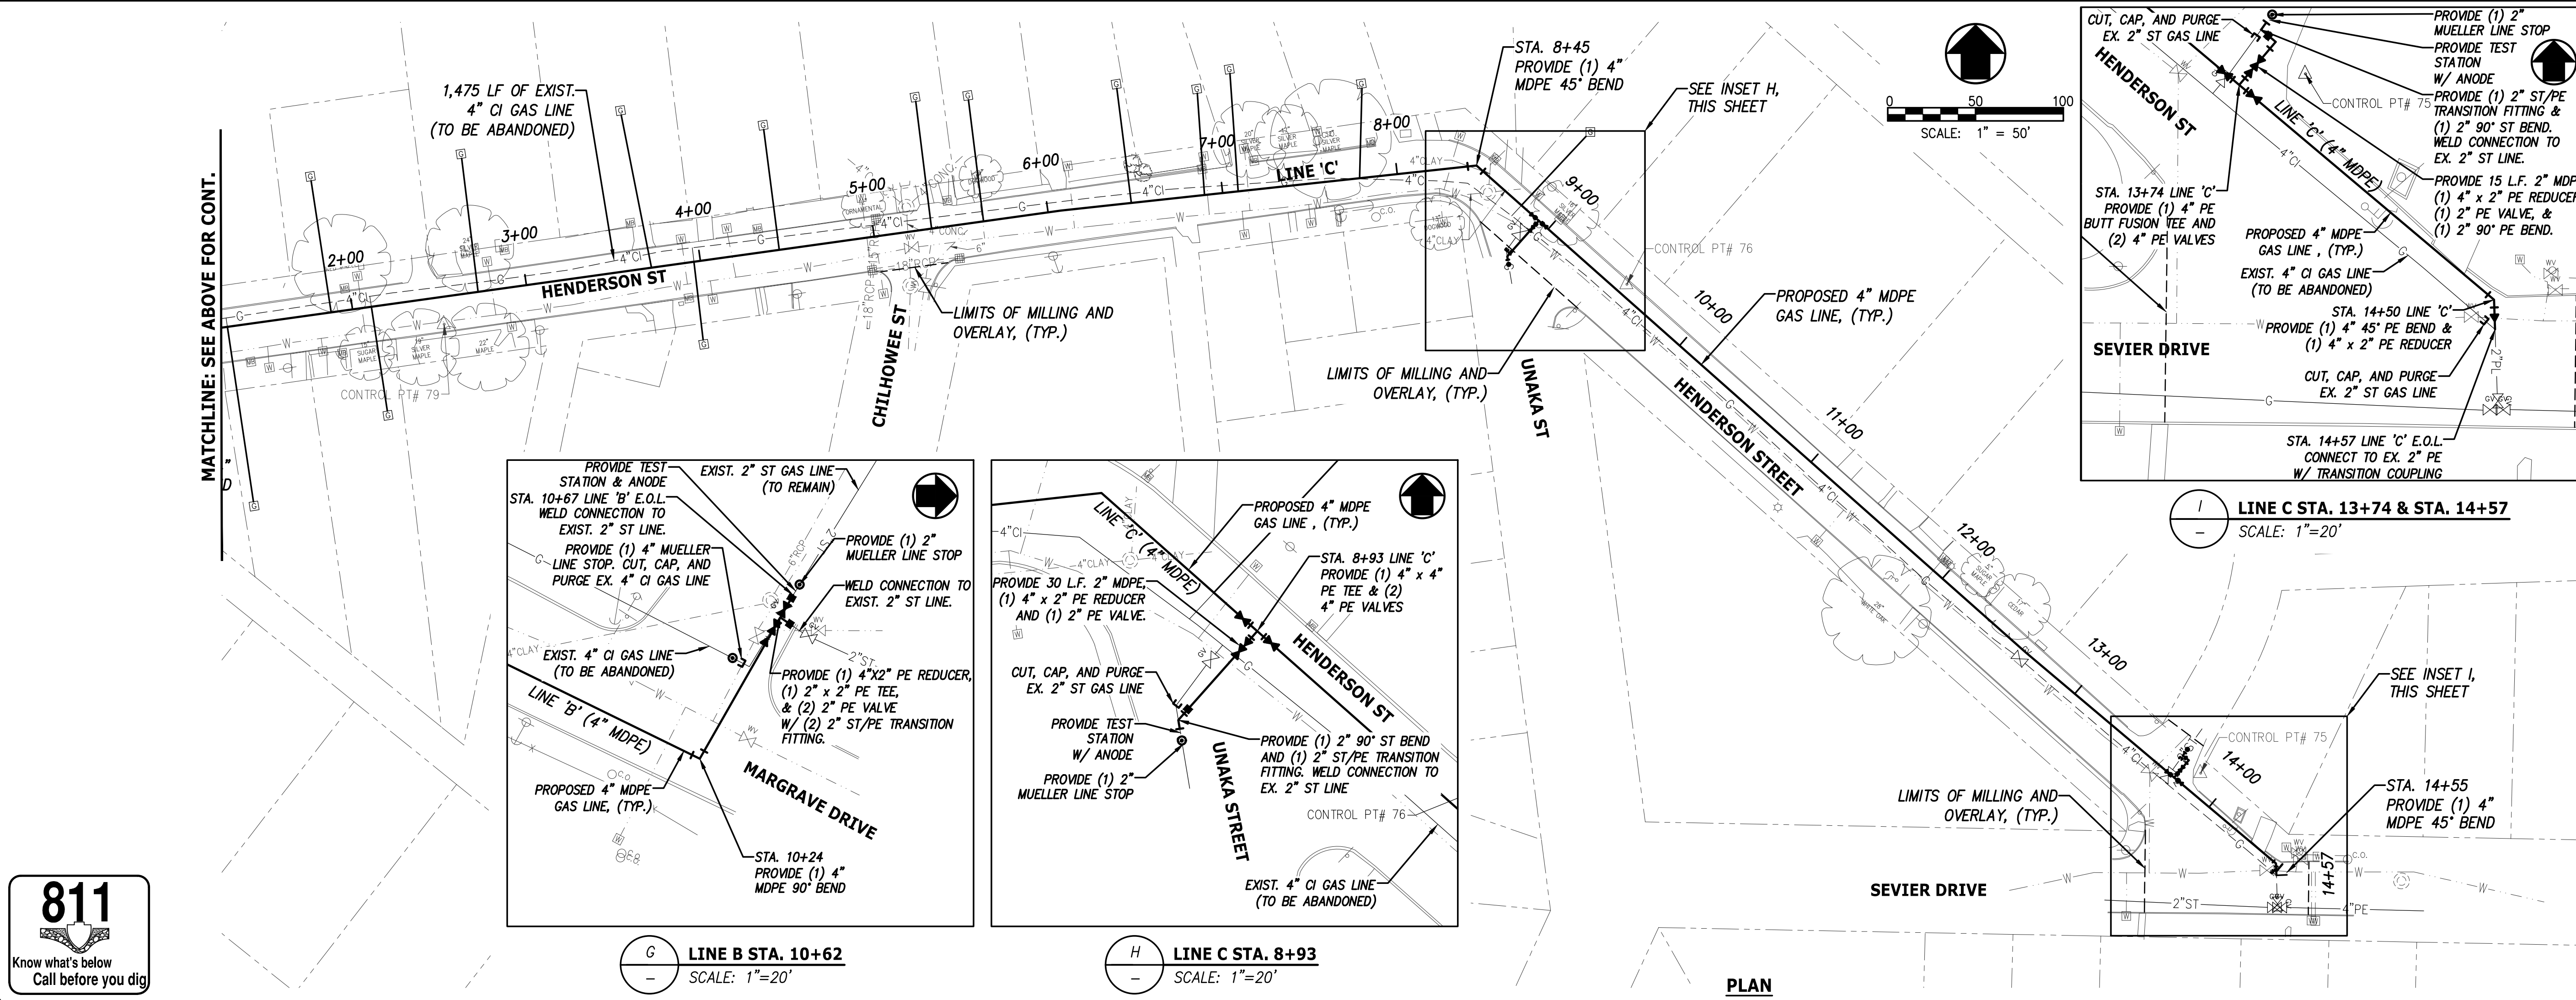

INITIAL ISSUE FOR CONSTRUCTION	08/07/2019
REVISIONS	DATE

CANNON & CANNON INC.
CONSULTING ENGINEERS - FIELD SURVEYORS
TEL 865.670.8555 8550 Kingston Pike
WWW.CANNON-CANNON.COM Knoxville, TN 37919

CLIENT: HARRIMAN UTILITY BOARD
200 NORTH ROANE STREET
HARRIMAN, TN 37748
(865) 882-3242



PROJECT: CAST IRON GAS MAIN REPLACEMENT PHASE III & IV
HARRIMAN, TN

GAS LINE PLAN

CCI PROJECT NO.	90923-0010
DRAWING DATE	AUGUST 7, 2019
PM	WWL QC SAF
DRAWN	WBW PIC WHC


G1.02



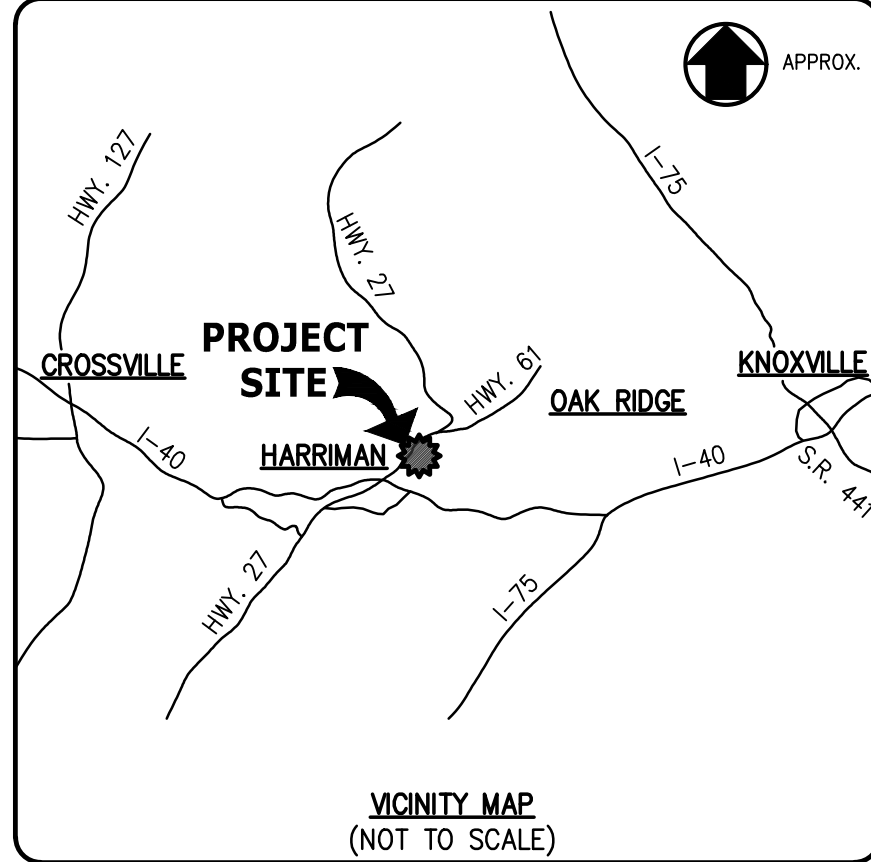
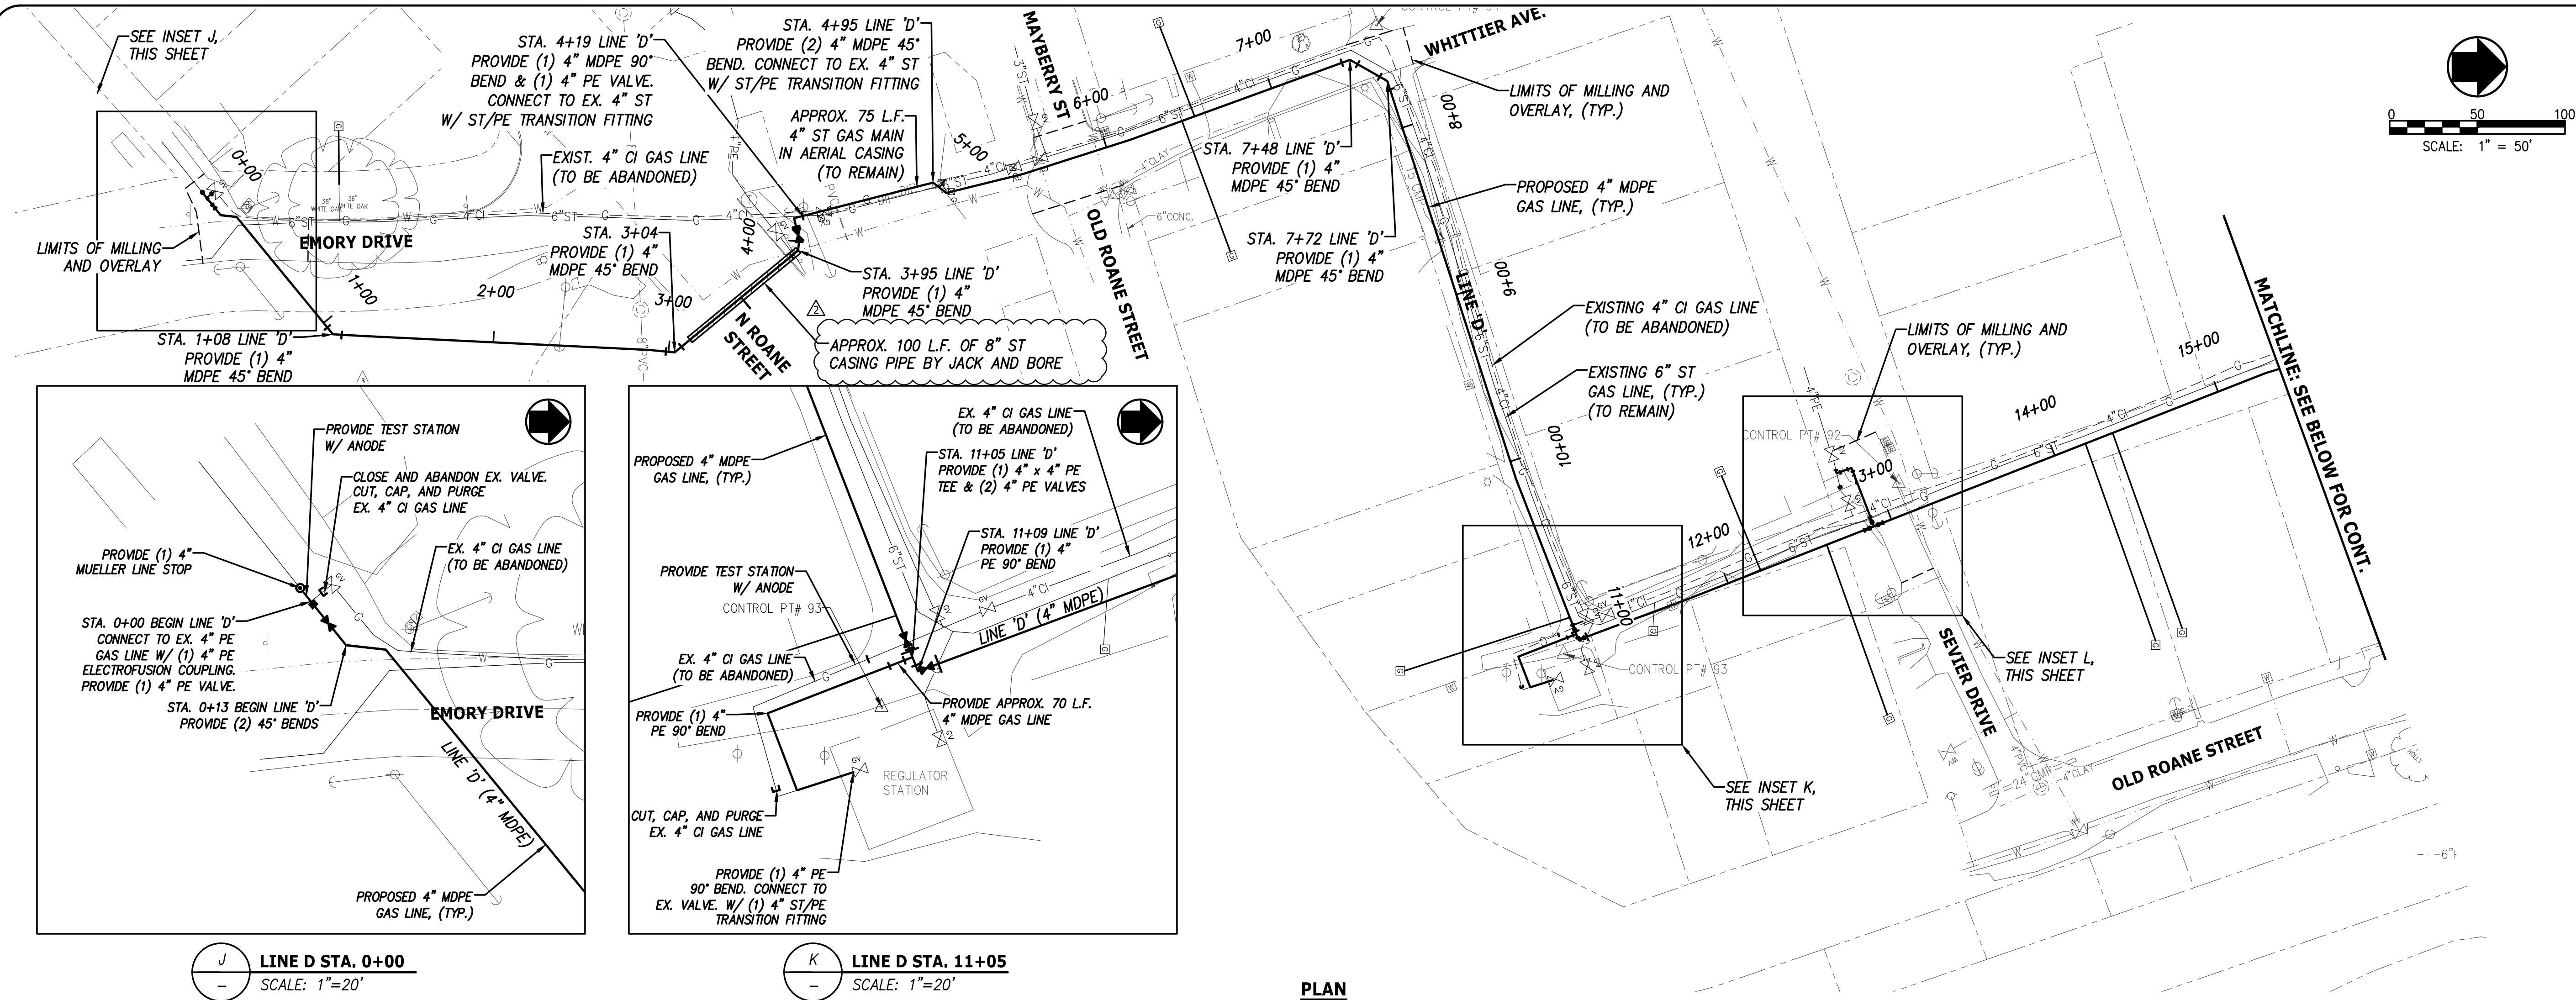


LEGEND

—	PROPOSED GAS MAIN
—	PROPOSED GAS SERVICE
—	EXISTING GAS TO REMAIN
—	EXISTING GAS TO BE ABANDONED
—	EXISTING WATER
—	EXISTING WATER VALVE
—	EXISTING SANITARY SEWER
—	EXISTING SEWER MANHOLE
—	EXISTING PROPERTY LINE
—	EXISTING GAS METER
—	EXISTING GAS VALVE
—	EXISTING GAS MARKER
—	EXISTING POWER MANHOLE
—	EXISTING TELEPHONE/COMM. M.H.
—	EXISTING STORM SEWER
—	EXISTING STORM CATCHBASIN
—	EXISTING LIGHT POLE
—	EXISTING POWER POLE
—	SURVEY CONTROL POINT
—	EXISTING FENCE
—	EXISTING BUILDING
—	PROPOSED GAS VALVE
—	PROPOSED TRANSITION COUPLING
—	PROPOSED REDUCER
—	PROPOSED LINE STOP

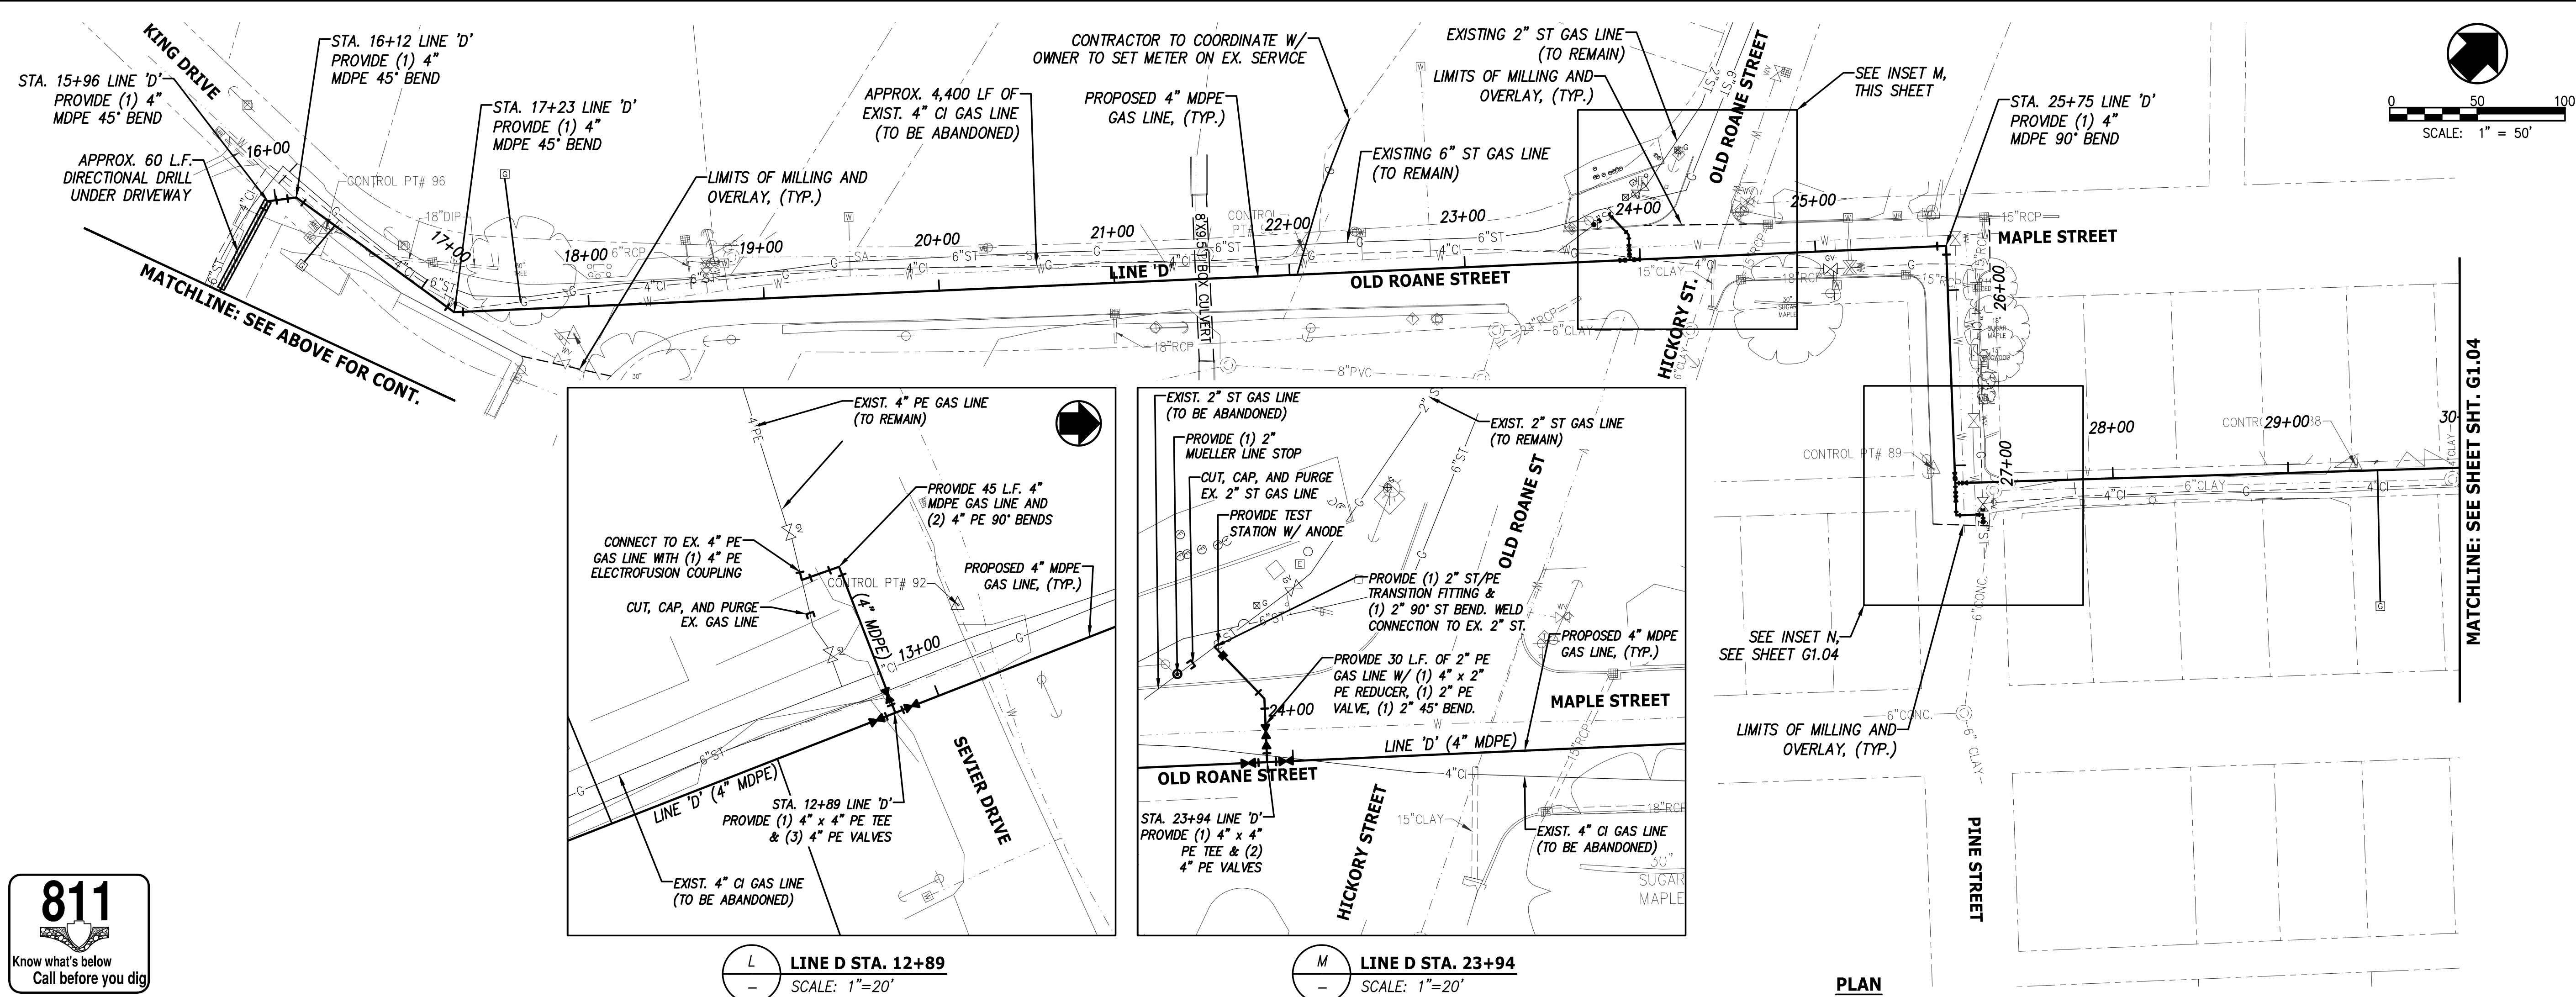


REVISE N ROANE ST BORE TO INCLUDE 8" ST CASING	08/30/2019
INITIAL ISSUE FOR CONSTRUCTION	08/07/2019
REVISIONS	DATE
CANNON & CANNON INC CONSULTING ENGINEERS - FIELD SURVEYORS TEL 865.670.8555 8550 Kingston Pike WWW.CANNON-CANNON.COM Knoxville, TN 37919	
CLIENT:	HARRIMAN UTILITY BOARD 200 NORTH ROANE STREET HARRIMAN, TN 37748 (865) 882-3242
PROJECT:	CAST IRON GAS MAIN REPLACEMENT PHASE III & IV HARRIMAN, TN
GAS LINE PLAN	
	CCI PROJECT NO. 90923-0010
	DRAWING DATE AUGUST 7, 2019
	PM WWL QC SAF
	DRAWN WBW PIC WHC
G1.03	

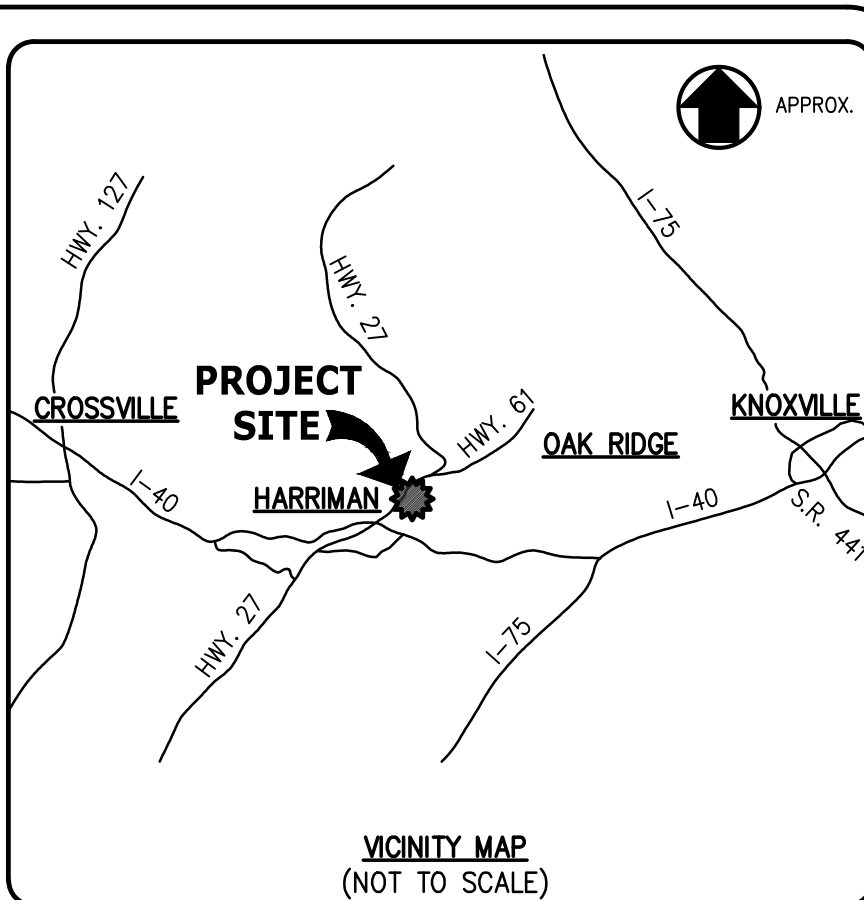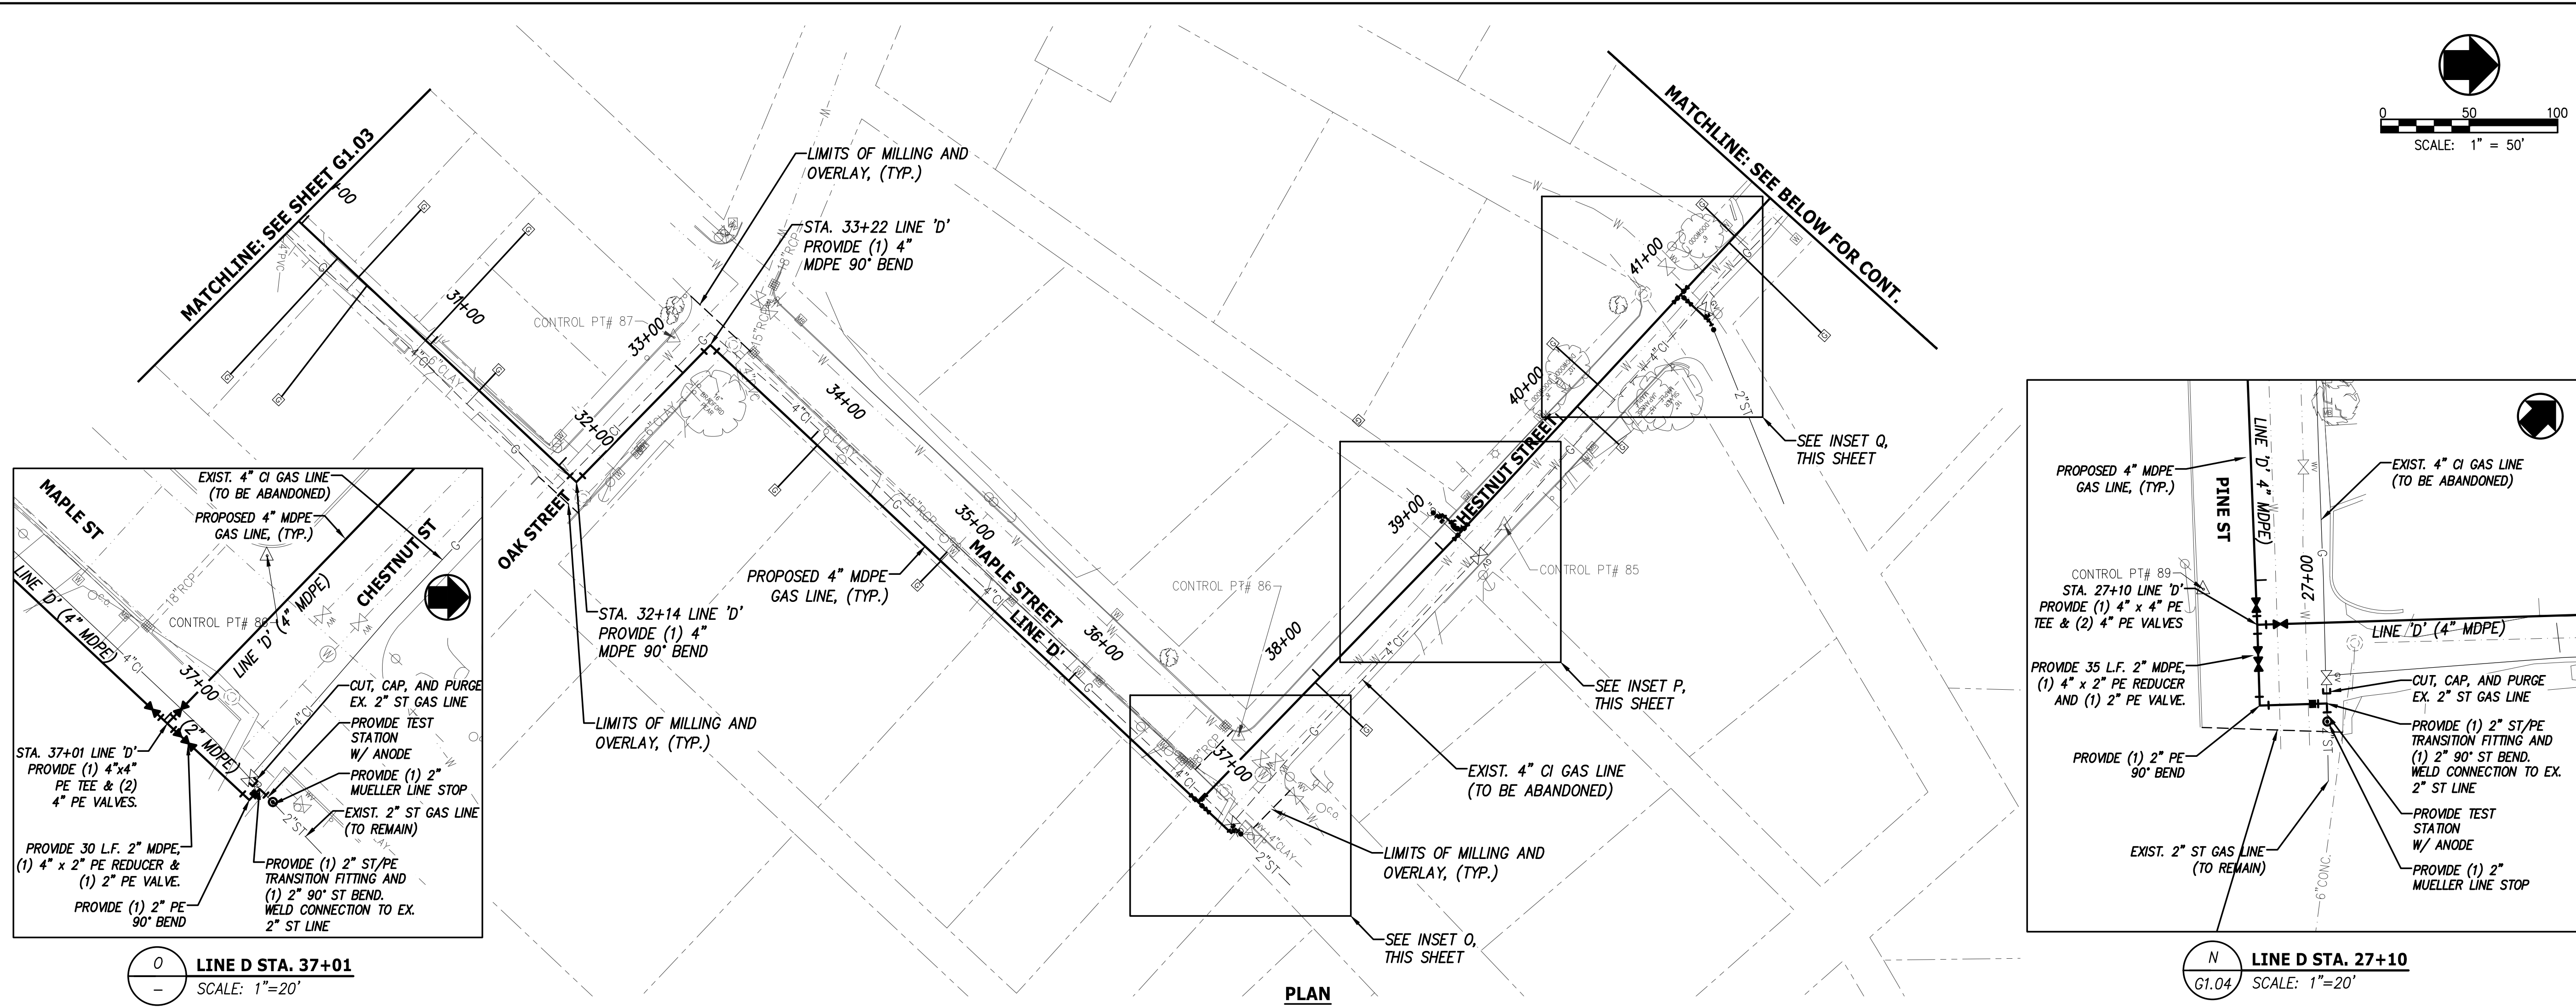


LEGEND


	PROPOSED GAS MAIN
	PROPOSED GAS SERVICE
	EXISTING GAS TO REMAIN
	EXISTING GAS TO BE ABANDONED
	EXISTING WATER
	EXISTING WATER VALVE
	EXISTING SANITARY SEWER
	EXISTING SEWER MANHOLE
	EXISTING PROPERTY LINE
	EXISTING GAS METER
	EXISTING GAS VALVE
	EXISTING GAS MARKER
	EXISTING POWER MANHOLE
	EXISTING TELEPHONE/COMM. M.H.
	EXISTING STORM SEWER
	EXISTING STORM CATCHBASIN
	EXISTING LIGHT POLE
	EXISTING POWER POLE
	SURVEY CONTROL POINT
	EXISTING FENCE
	EXISTING BUILDING
	PROPOSED GAS VALVE
	PROPOSED TRANSITION COUPLING
	PROPOSED REDUCER
	PROPOSED LINE STOP

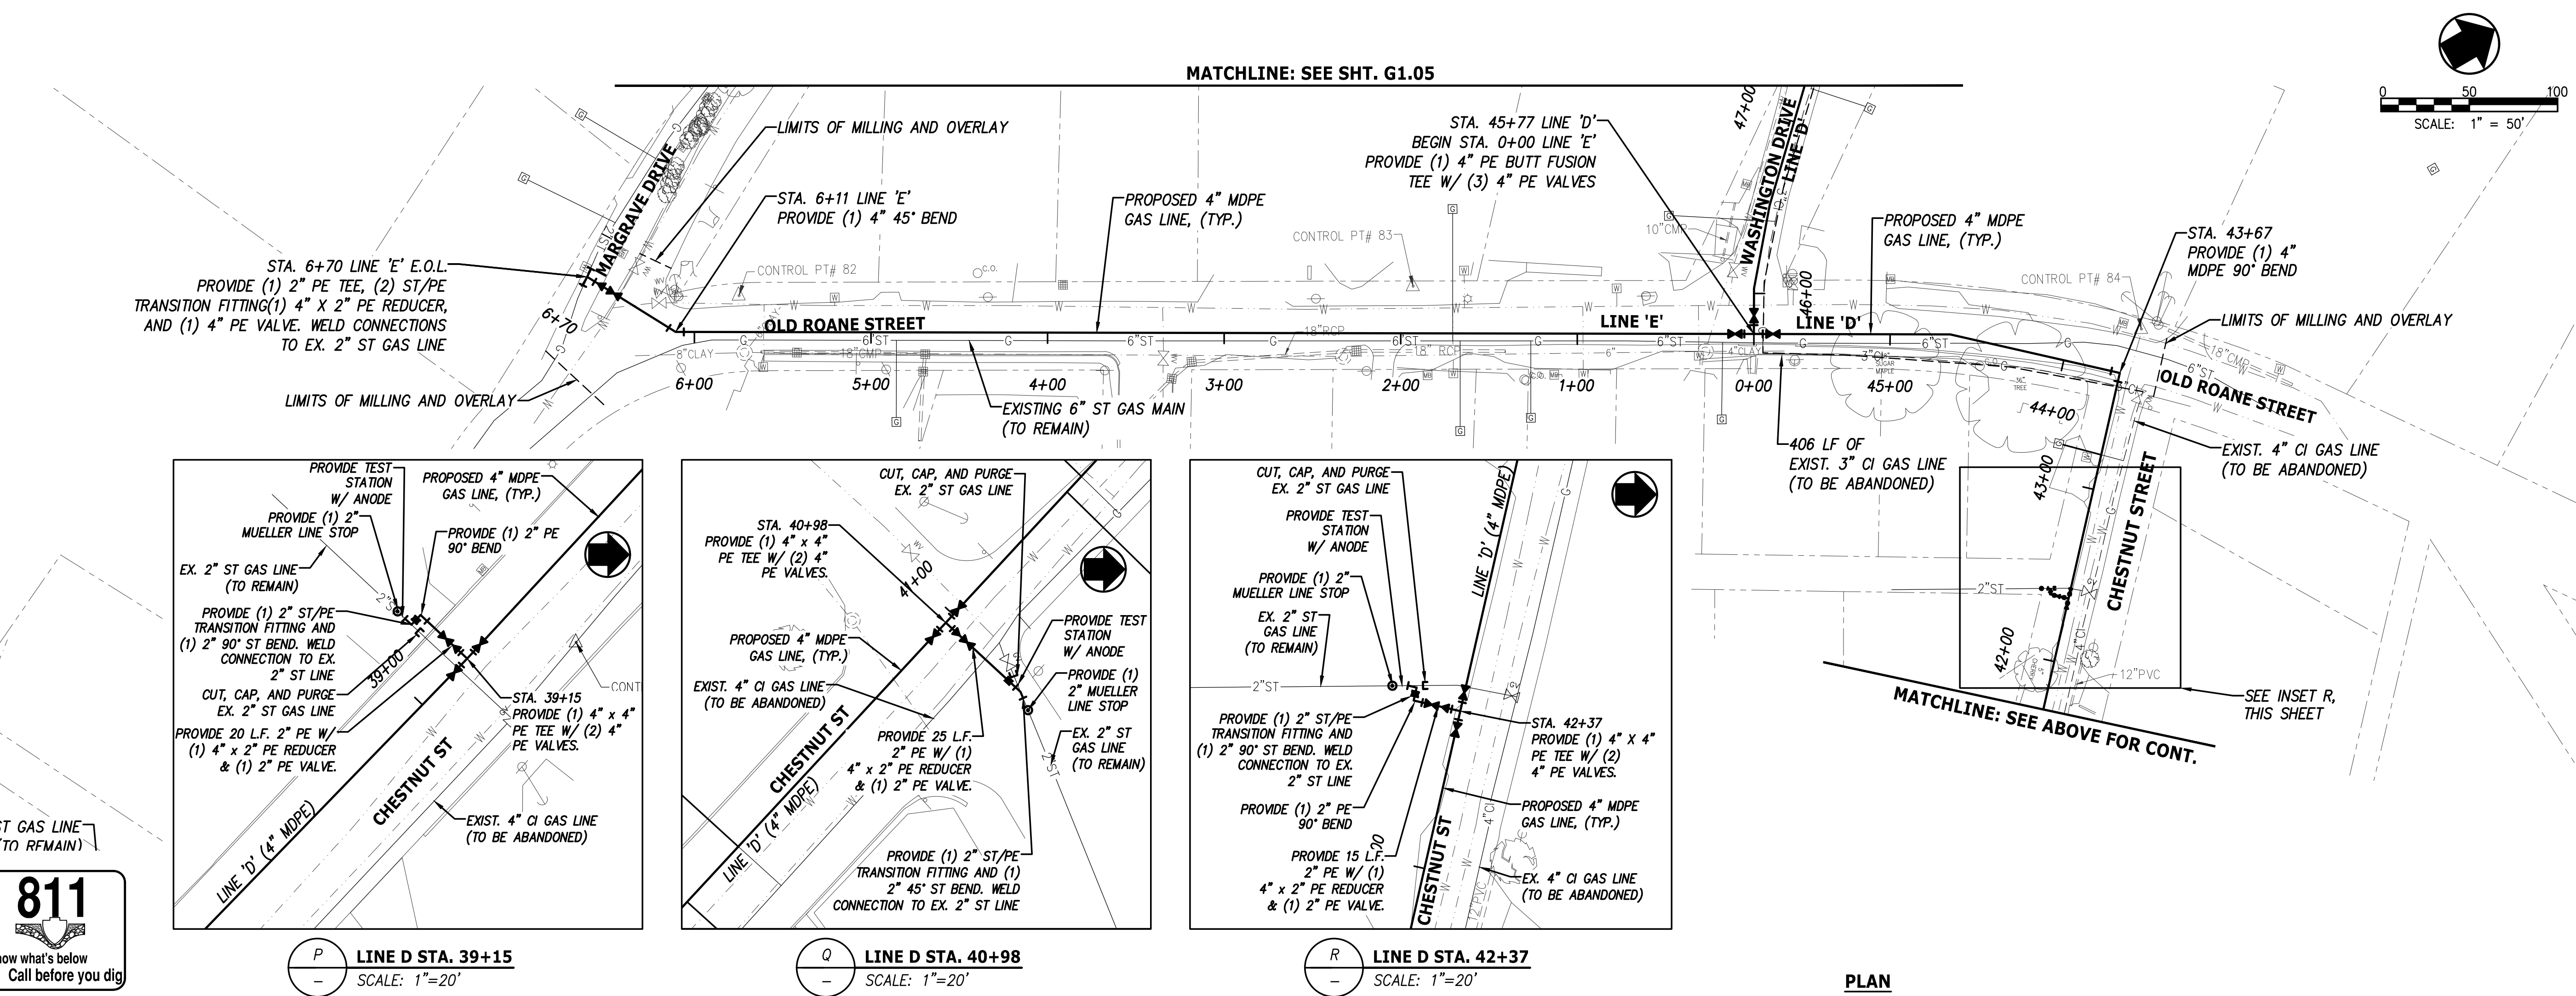


INITIAL ISSUE FOR CONSTRUCTION		08/07/2019
REVISIONS		DATE
CANNON & CANNON INC. CONSULTING ENGINEERS - FIELD SURVEYORS TEL 865.670.8555 8550 Kingston Pike WWW.CANNON-CANNON.COM Knoxville, TN 37919		
CLIENT:	HARRIMAN UTILITY BOARD 200 NORTH ROANE STREET HARRIMAN, TN 37748 (865) 882-3242	
PROJECT:	CAST IRON GAS MAIN REPLACEMENT PHASE III & IV HARRIMAN, TN	
GAS LINE PLAN		
	CCI PROJECT NO.	90923-0010
	DRAWING DATE	AUGUST 7, 2019
	PM WWL QC SAF	
	DRAWN WBW PIC WHC	
		G1.04

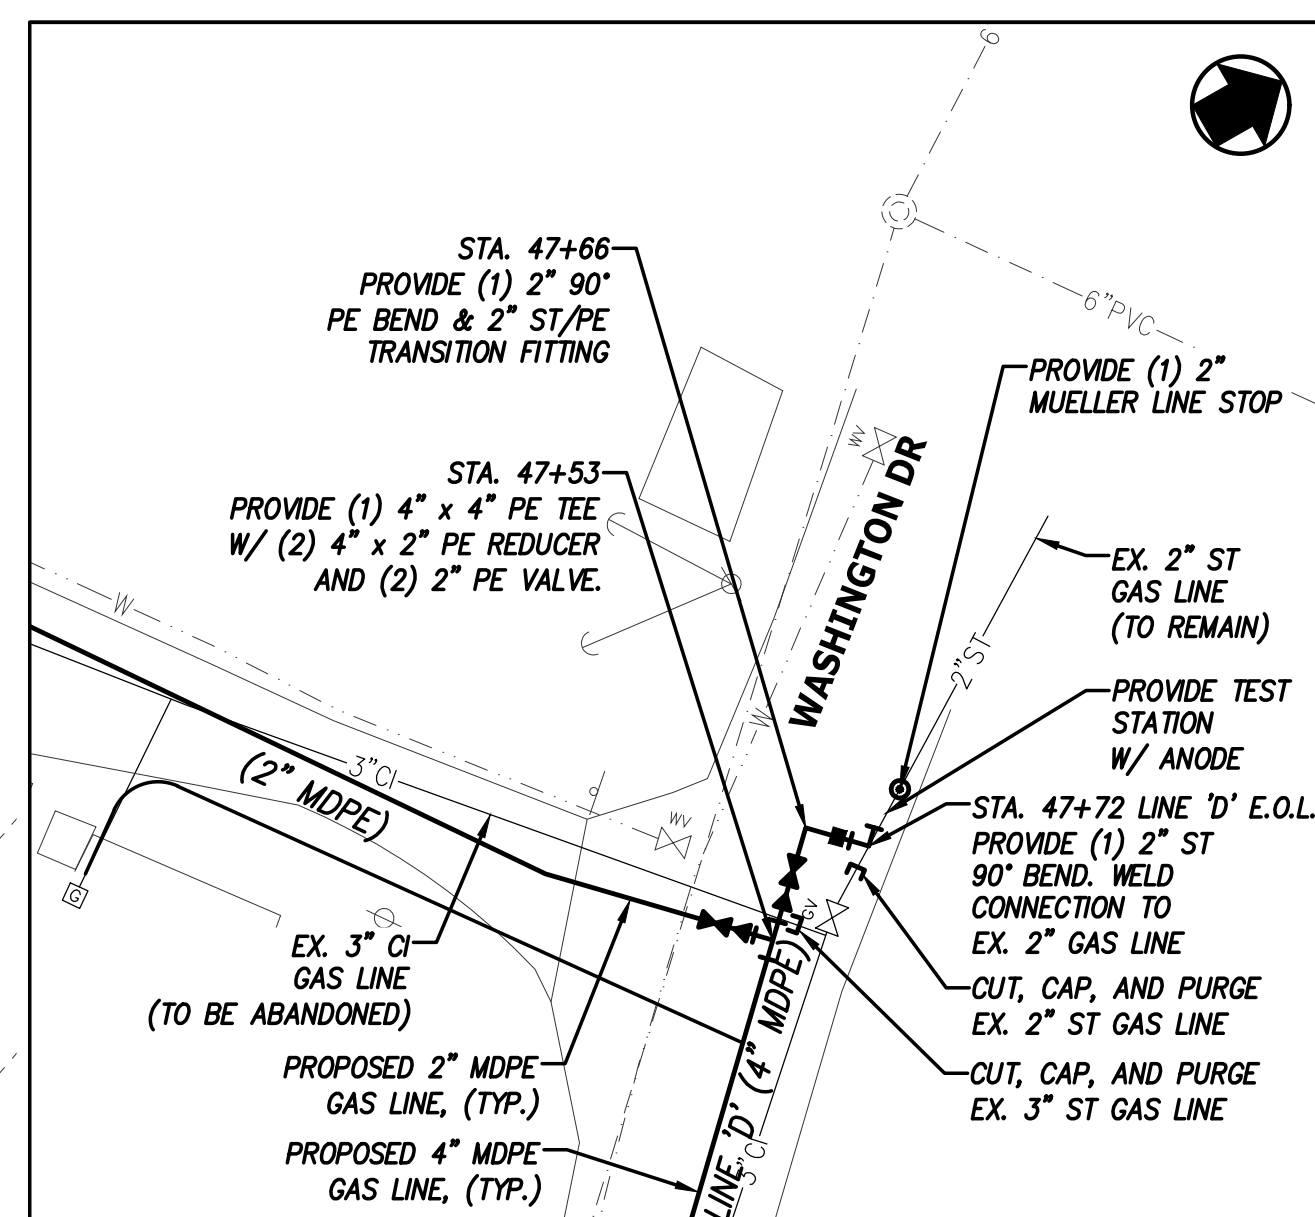



S **LINE D STA. 47+72 E.O.L.**
SCALE: 1"=20'

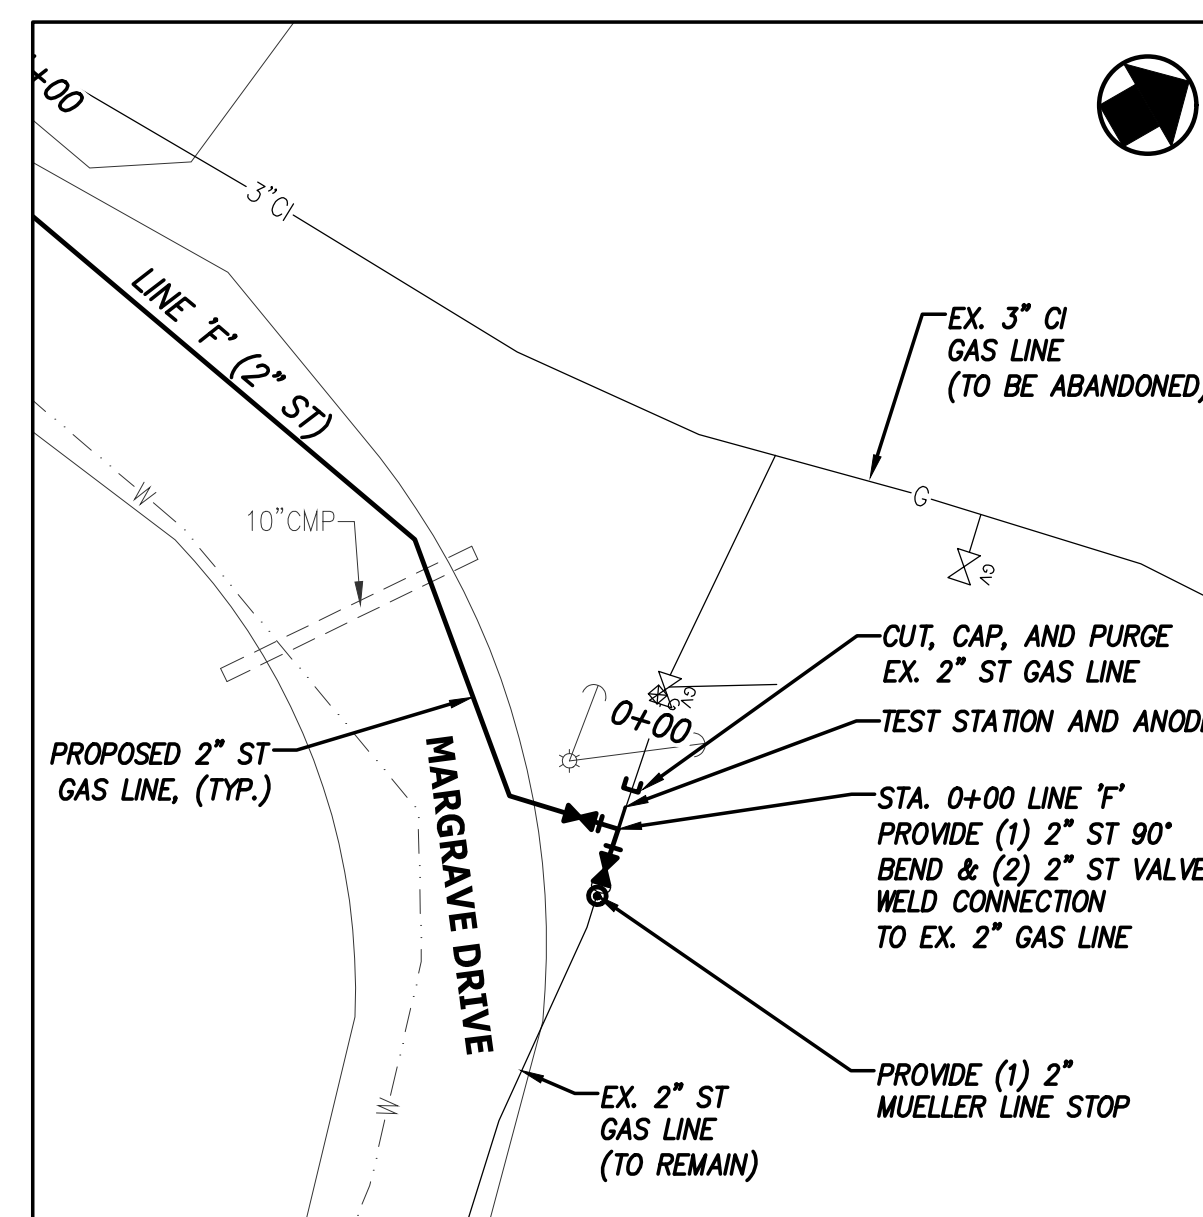


T **LINE F STA. 0+00**
SCALE: 1"=20'

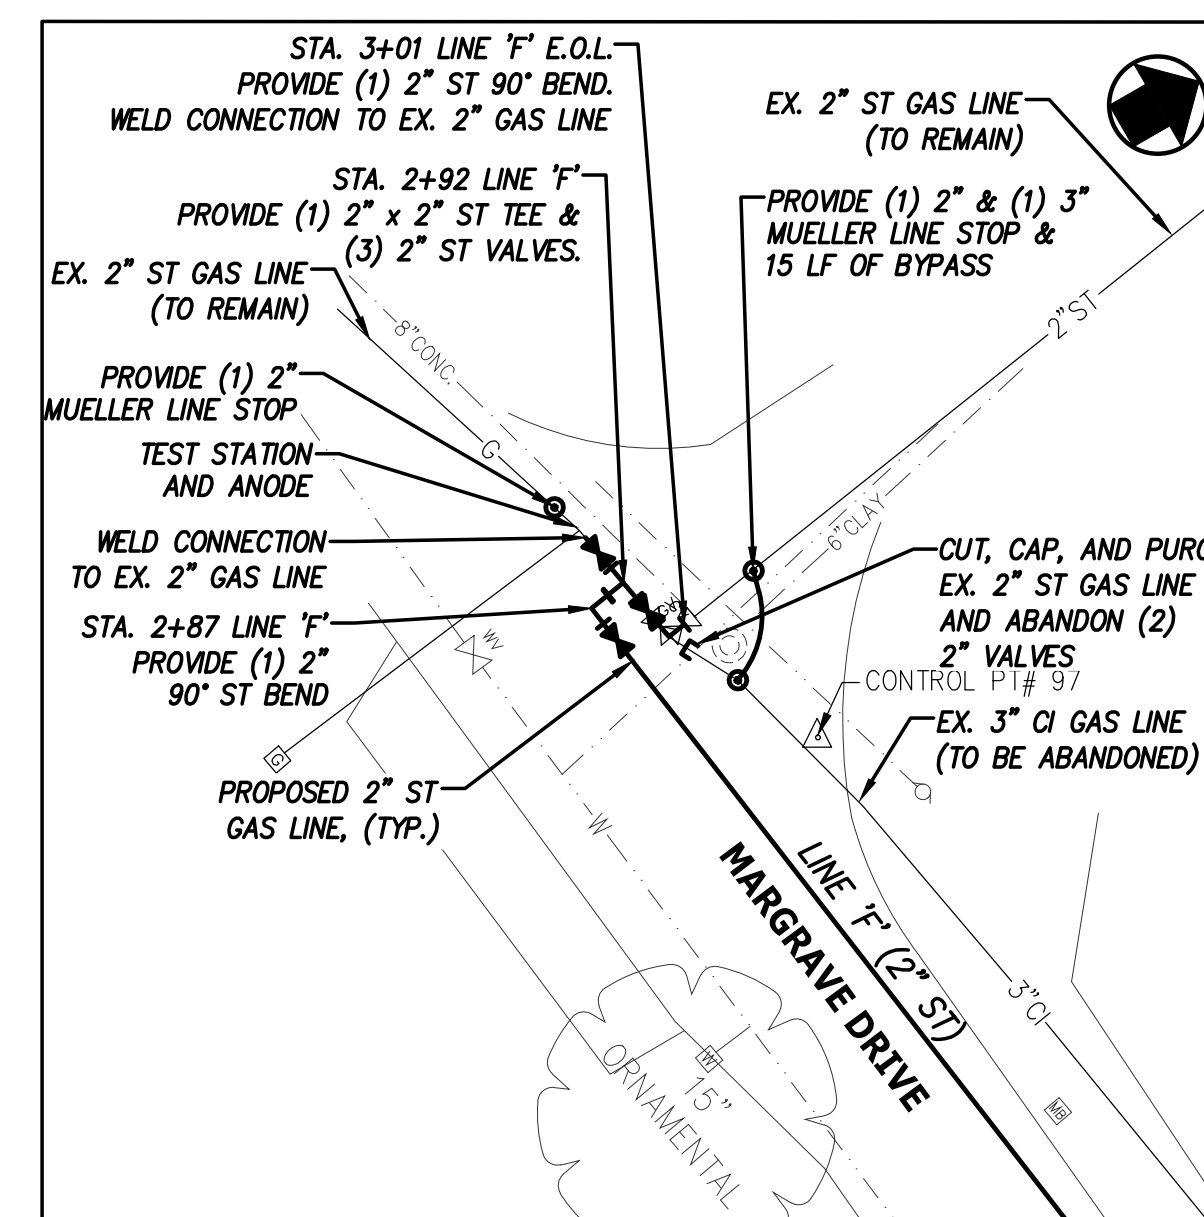

U **LINE F STA. 3+01 E.O.L.**
SCALE: 1"=20'

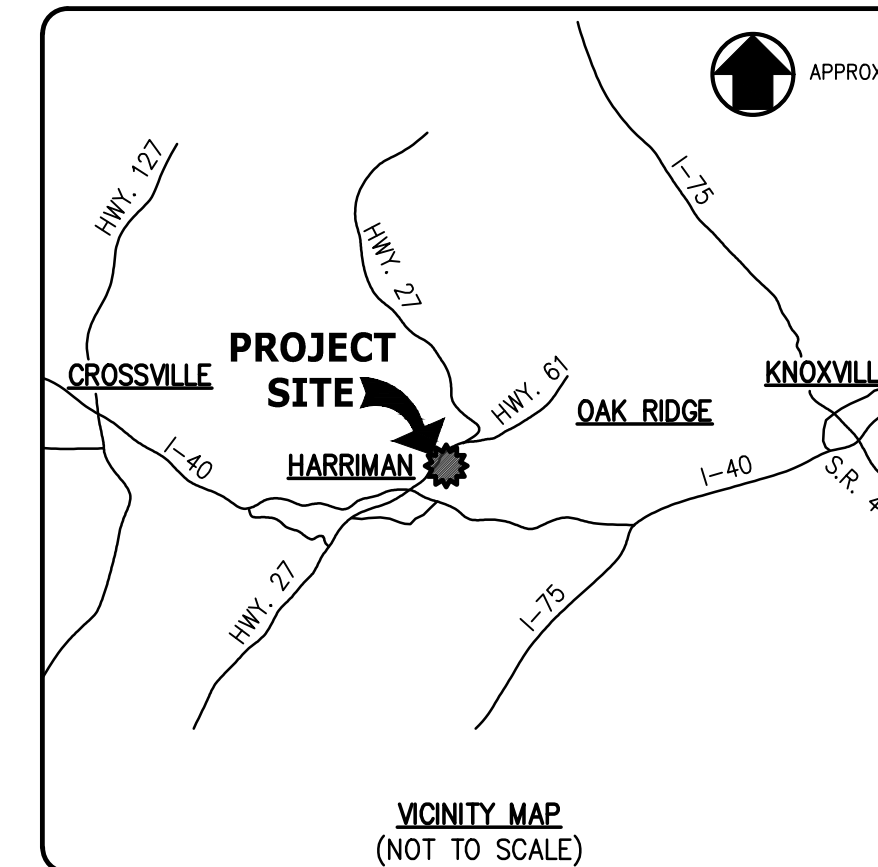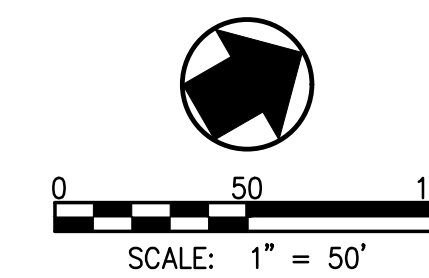

LEGEND	
	PROPOSED GAS MAIN
	PROPOSED GAS SERVICE
	EXISTING GAS TO REMAIN
	EXISTING GAS TO BE ABANDONED
	EXISTING WATER
	EXISTING WATER VALVE
	EXISTING SANITARY SEWER
	EXISTING SEWER MANHOLE
	EXISTING PROPERTY LINE
	EXISTING GAS METER
	EXISTING GAS VALVE
	EXISTING GAS MARKER
	EXISTING POWER MANHOLE
	EXISTING TELEPHONE/COMM. M.H.
	EXISTING STORM SEWER
	EXISTING STORM CATCHBASIN
	EXISTING LIGHT POLE
	EXISTING POWER POLE
	SURVEY CONTROL POINT
	EXISTING FENCE
	EXISTING BUILDING
	PROPOSED GAS VALVE
	PROPOSED TRANSITION COUPLING
	PROPOSED REDUCER
	PROPOSED LINE STOP

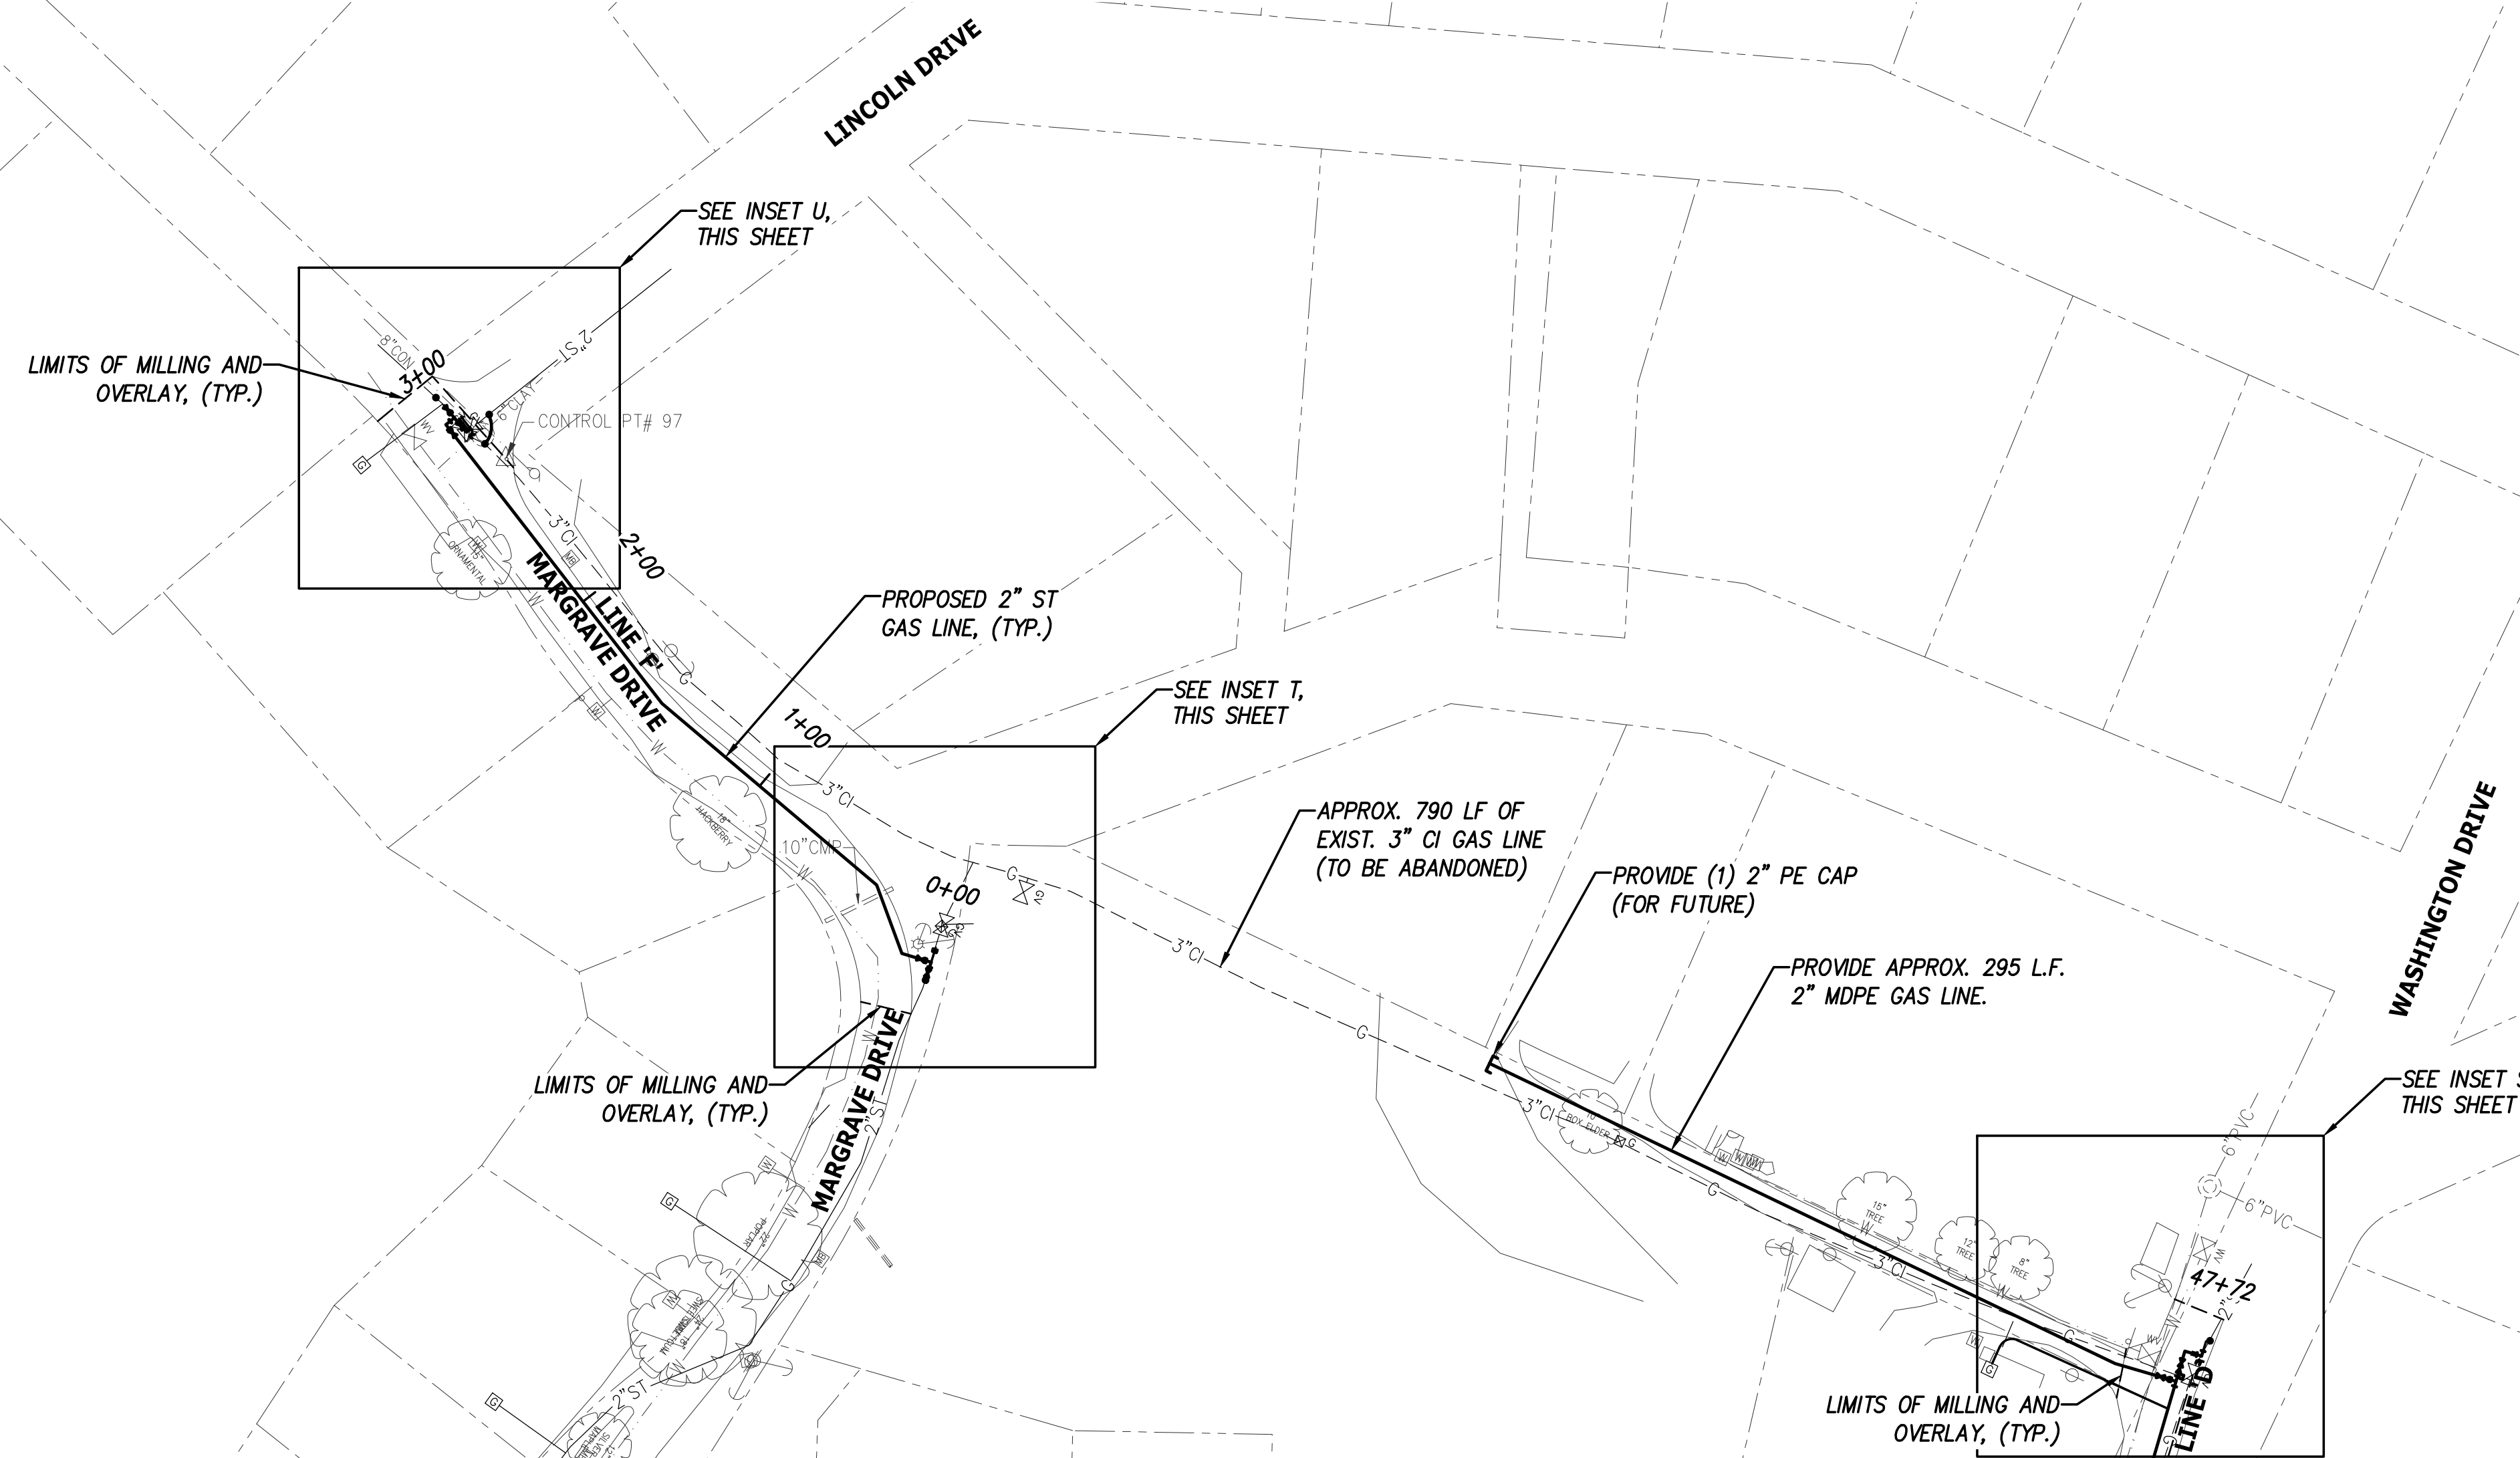

MATCHLINE: SEE SHT. G1.04


PLAN

INITIAL ISSUE FOR CONSTRUCTION		08/07/2019
REVISIONS		DATE
CANNON & CANNON INC. CONSULTING ENGINEERS - FIELD SURVEYORS TEL 865.670.8555 8550 Kingston Pike WWW.CANNON-CANNON.COM Knoxville, TN 37919		
CLIENT: HARRIMAN UTILITY BOARD 200 NORTH ROANE STREET HARRIMAN, TN 37748 (865) 882-3242		
PROJECT: CAST IRON GAS MAIN REPLACEMENT PHASE III & IV HARRIMAN, TN		


GAS LINE PLAN

	CCI PROJECT NO. 90923-0010	
	DRAWING DATE	AUGUST 7, 2019
	PM WWL QC SAF	
	DRAWN WBW PIC WHC	
G1.05		




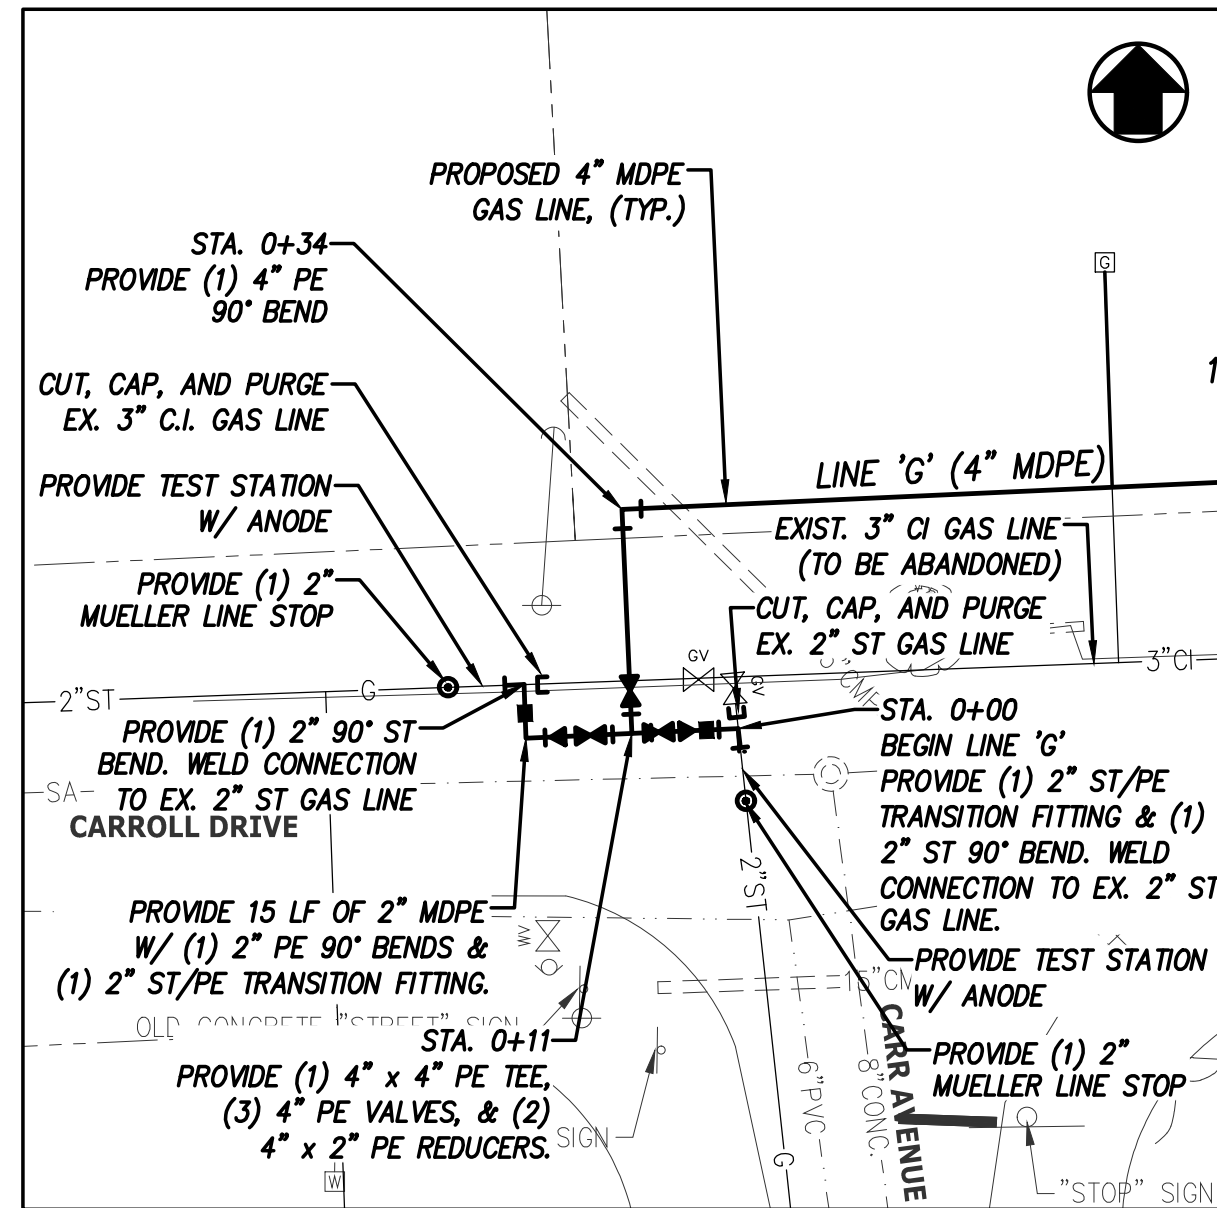


V LINE G STA. 0+00 & 0+11
SCALE: 1"=20'

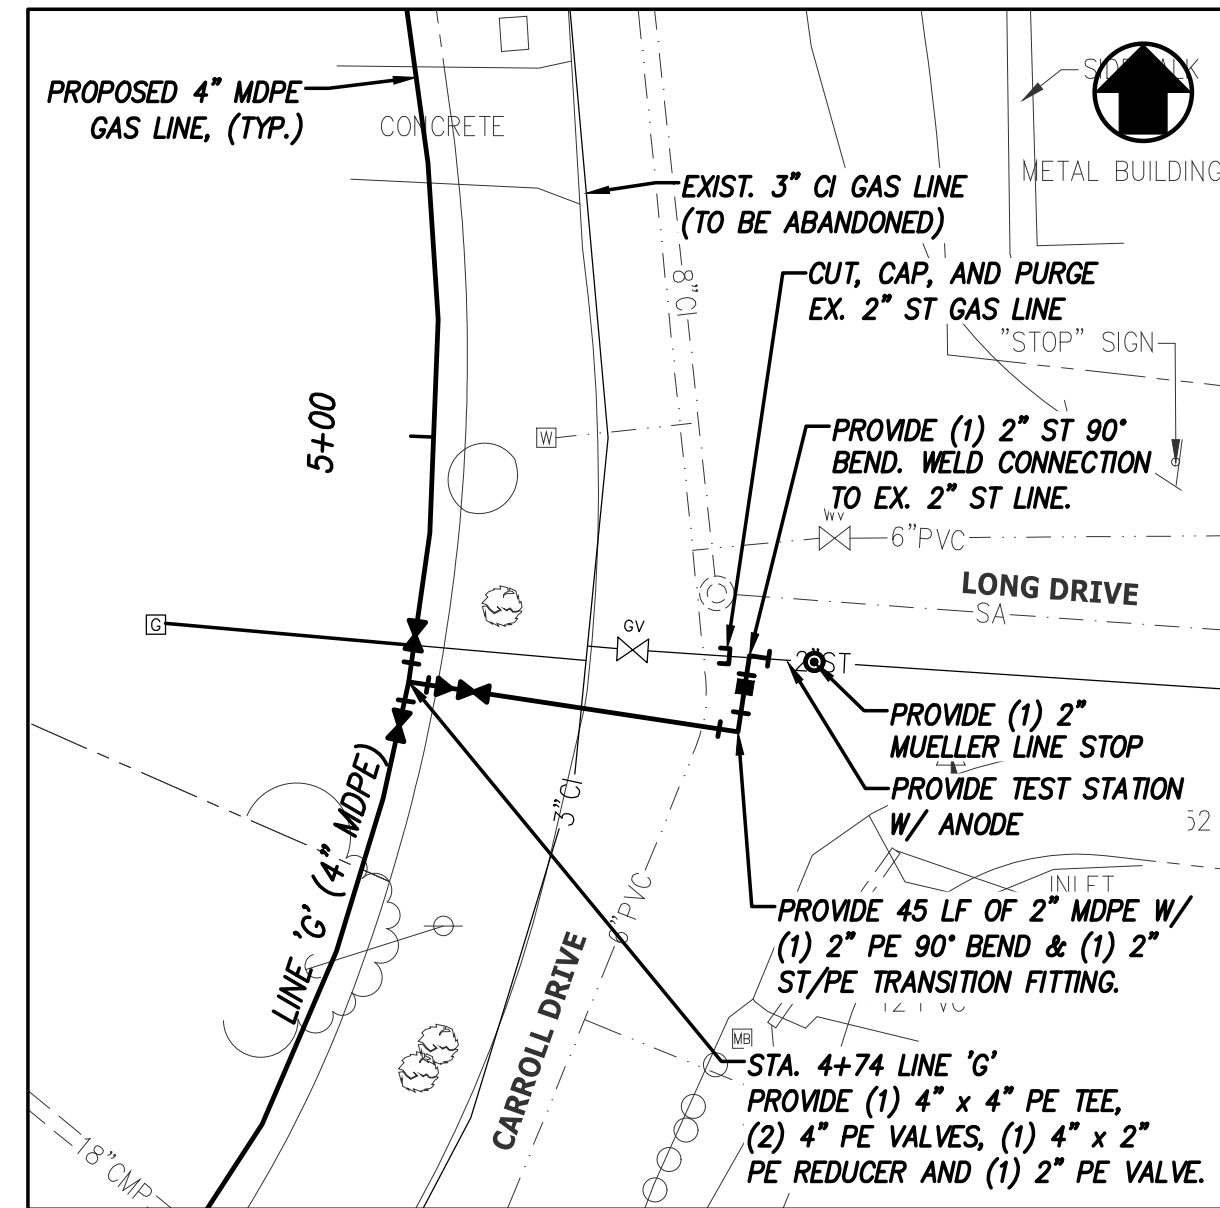



W LINE G STA. 4+74
SCALE: 1"=20'

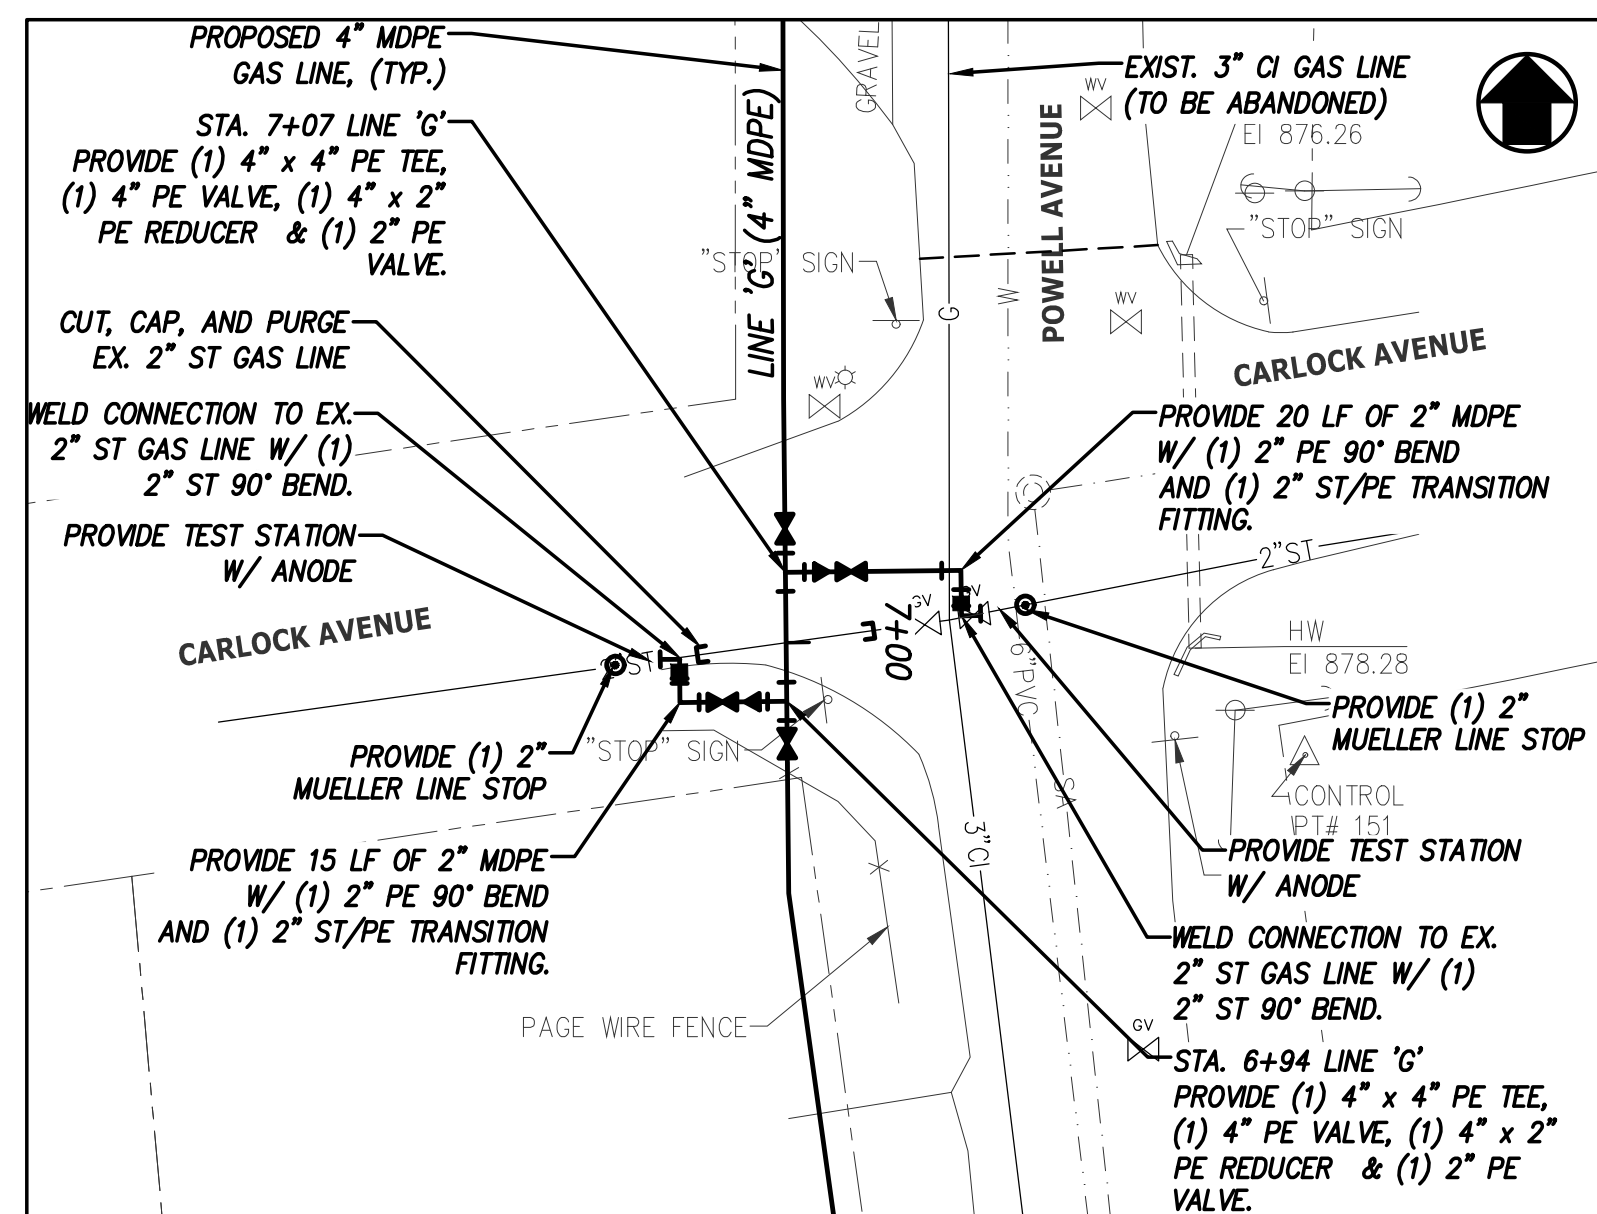

X LINE G STA. 6+94 & STA. 7+07
SCALE: 1"=20'

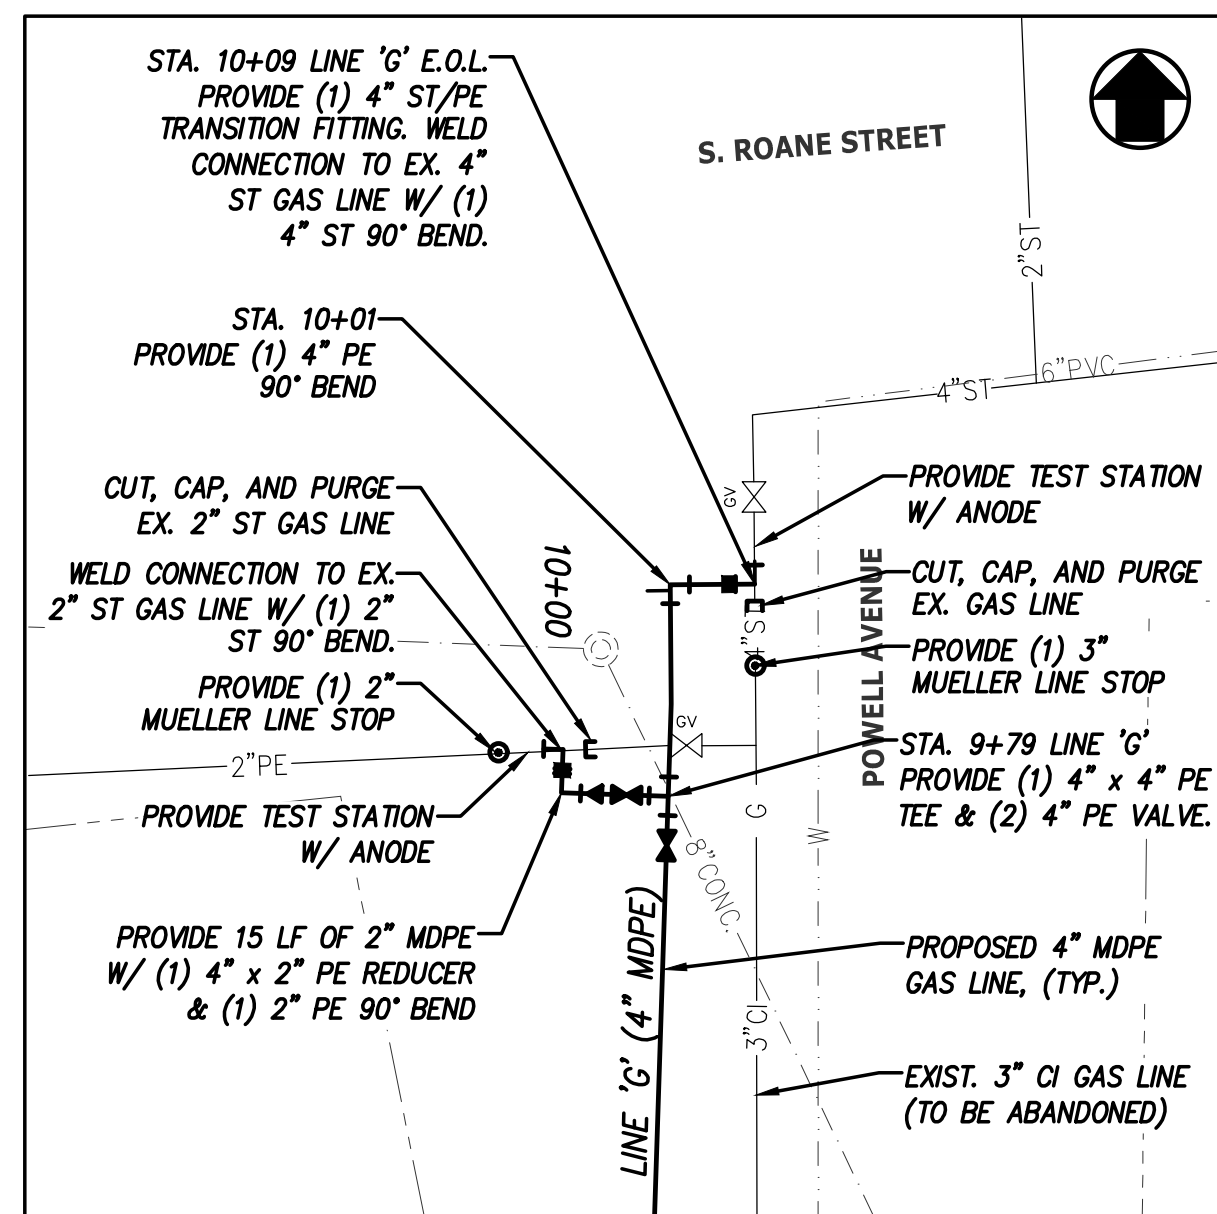

Y LINE G STA. 9+79 & STA. 10+09
SCALE: 1"=20'

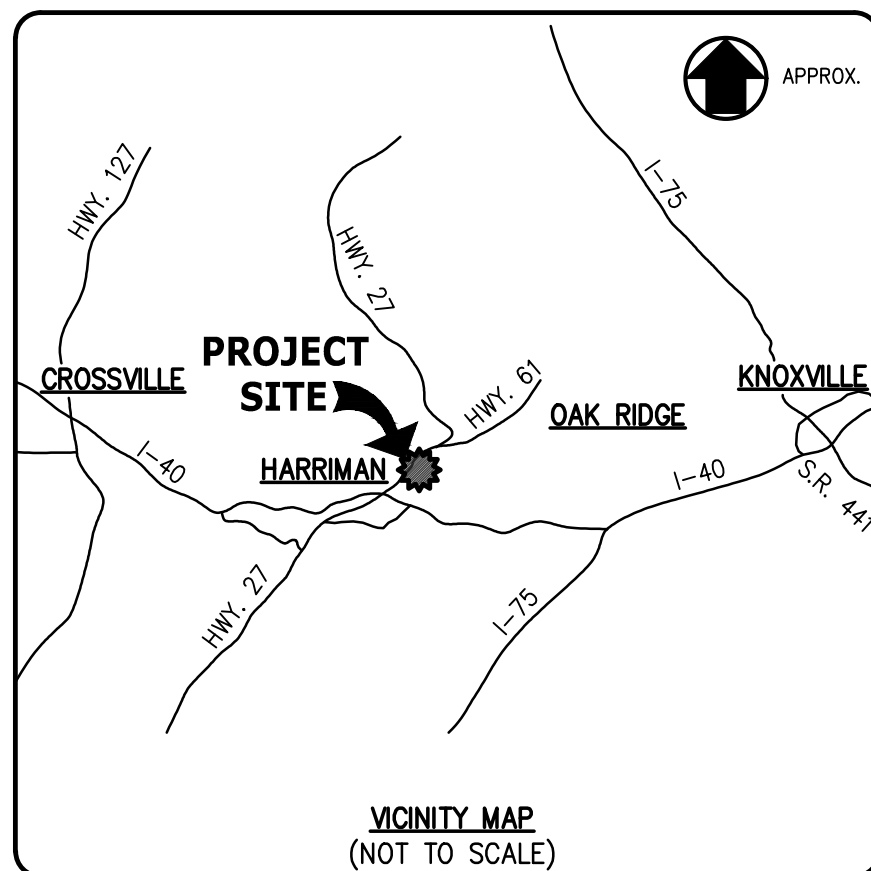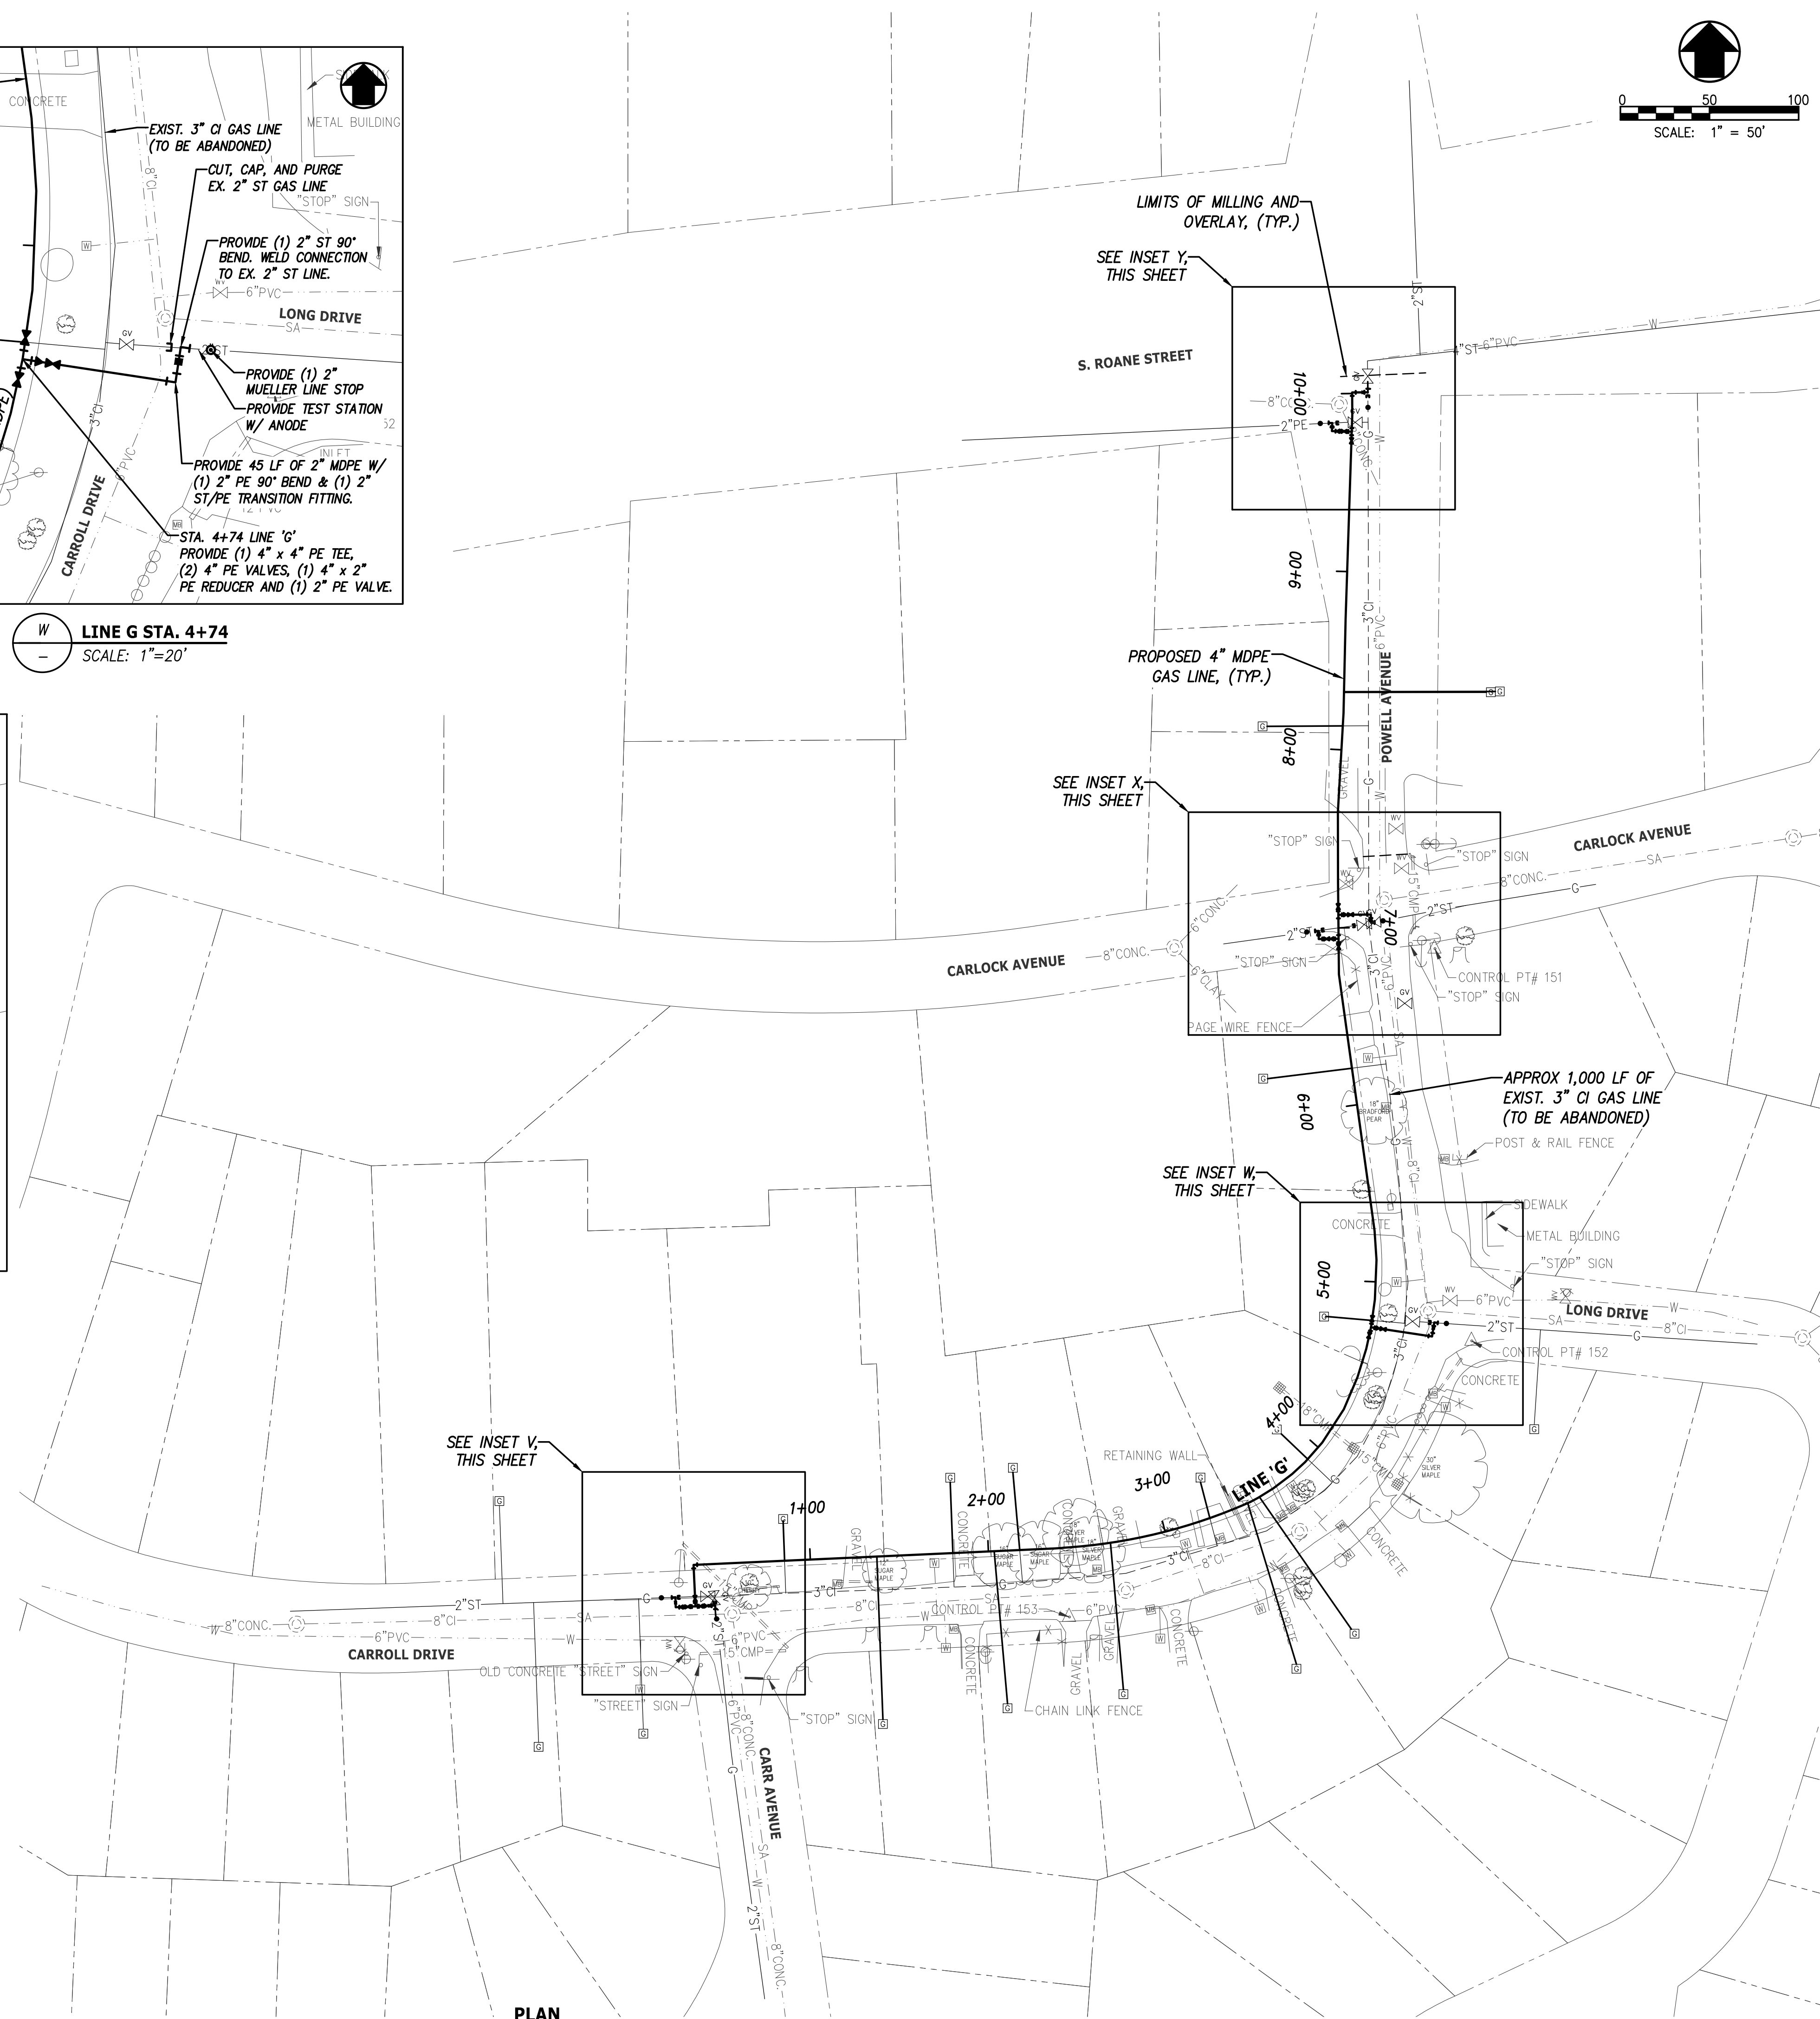

LEGEND	
	PROPOSED GAS MAIN
	PROPOSED GAS SERVICE
	EXISTING GAS TO REMAIN
	EXISTING GAS TO BE ABANDONED
	EXISTING WATER
	EXISTING WATER VALVE
	EXISTING SANITARY SEWER
	EXISTING SEWER MANHOLE
	EXISTING PROPERTY LINE
	EXISTING GAS METER
	EXISTING GAS VALVE
	EXISTING GAS MARKER
	EXISTING POWER MANHOLE
	EXISTING TELEPHONE/COMM. M.H.
	EXISTING STORM SEWER
	EXISTING STORM CATCHBASIN
	EXISTING LIGHT POLE
	EXISTING POWER POLE
	SURVEY CONTROL POINT
	EXISTING FENCE
	EXISTING BUILDING
	PROPOSED GAS VALVE
	PROPOSED TRANSITION COUPLING
	PROPOSED REDUCER
	PROPOSED LINE STOP

INITIAL ISSUE FOR CONSTRUCTION	08/07/2019
REVISIONS	DATE

CANNON & CANNON INC.
CONSULTING ENGINEERS - FIELD SURVEYORS


TEL 865.670.8555 8550 Kingston Pike
WWW.CANNON-CANNON.COM Knoxville, TN 37919

CLIENT: HARRIMAN UTILITY BOARD
200 NORTH ROANE STREET
HARRIMAN, TN 37748
(865) 882-3242

PROJECT: CAST IRON GAS MAIN REPLACEMENT PHASE III & IV
HARRIMAN, TN

GAS LINE PLAN


CCI PROJECT NO.	90923-0010
DRAWING DATE	AUGUST 7, 2019
PM WWL	QC SAF
DRAWN WBW	PIC WHC

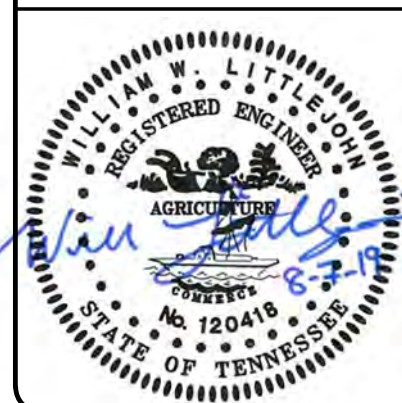


G1.06



1. EDGE TO BE SAWED WITH A CONCRETE SAW TO A NEAT SQUARED EDGE. ALL PATCHES SHALL BE SQUARE OR RECTANGULAR PARALLEL TO CURB. CUTS SHALL BE BROOM-SWEEP CLEAN OF DUST BEFORE TACK COAT IS APPLIED.
2. EDGES TO BE TACKED WITH EMULSIFIED ASPHALT TACK CRS-I OR CRS-II.
3. CUTTING AND REPAIRING EXISTING PAVEMENT CONCRETE OR GRAVEL SHALL BE IN ACCORDANCE WITH OWNER'S REQUIREMENTS
4. BACKFILL AND BEDDING MATERIAL SHALL BE COMPACTED IN 6" LIFTS WITH JUMPING JACK COMPACTOR TO 95% DENSITY PRIOR TO PLACING SUCCEEDING LIFTS.
5. MINIMUM TRENCH WIDTH SHALL BE 12" EACH SIDE OF PIPE IN ROCK EXCAVATION.
6. WIRE CONNECTOR: DRY CONN® DRY BURY LUG YELLOW OR PRE-APPROVED EQUAL.
7. ALLEY AND DRIVEWAY PATCHING SHALL CONSIST OF 2" DEPTH SURFACE COURSE ONLY ON AGGREGATE BASE. NO BASE COURSE

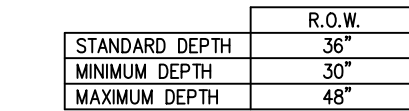


N.T.S.

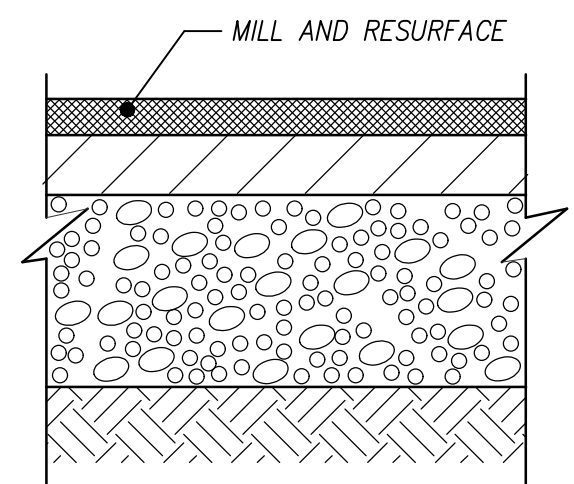

1. MILL 1-1/2" SURFACE ASPHALT COURSE AT 1-1/2" THICK (APPROX. 159 LB/SY)
TDOT SPEC. SECTION 415-01.02. "COLD PLANING BITUMINOUS PAVEMENT"
2. INSTALL SURFACE ASPHALT COURSE @ 1-1/2" THICK (APPROX. 159 LB/SY)
TDOT SPEC. SECTION 411-01.10 "GRADING "D" SURFACE (PG64-22)"
3. INSTALL LEVELING COURSE AS NEEDED TO PROVIDE LEVEL GRADES PRIOR TO
SURFACE ASPHALT COURSE INSTALLATION. INSTALL LEVEL COURSE IN
ACCORDANCE WITH TDOT STANDARDS AND SPECIFICATIONS.


STREET	SHEET NO.	START PT.	END PT.
CRESCENT AVE	G1.01	INTERSECTION W/ MARGRAVE DR	200 LF SE OF INTERSECTION W/ DEVONIA ST
MARGRAVE DR	G1.02	INTERSECTION W/ OAKDALE HWY	150 LF NE OF INTERSECTION W/ HENDERSON ST
HENDERSON ST	G1.02	INTERSECTION W/ MARGRAVE DR	INTERSECTION W/ SEVER DR
WHITTIER AVE	G1.03	INTERSECTION W/ MAYBERRY ST	200 LF NW OF INTERSECTION W/ MAYBERRY ST
SEVER DR	G1.03	LINE D. STA. 12+85	LINE D. STA. 13+35
KING DR	G1.03	LINE D. STA. 15+83	INTERSECTION W/ OLD ROANE ST
OLD ROANE ST	G1.03	INTERSECTION W/ KING DRIVE	INTERSECTION W/ PINE ST
PINE ST	G1.03	INTERSECTION W/ OLD ROANE ST	200 LF SW OF INTERSECTION W/ OLD ROANE ST
ALLEY	G1.03/G1.04	INTERSECTION W/ PINE ST	INTERSECTION W/ OAK ST
OAK ST	G1.04	INTERSECTION W/ ALLEY	INTERSECTION W/ MAPLE ST
CHESTNUT ST	G1.04	INTERSECTION W/ MAPLE ST	INTERSECTION W/ OLD ROANE ST
OLD ROANE ST	G1.04	INTERSECTION W/ CHESTNUT DR	INTERSECTION W/ MARGRAVE DR
WASHINGTON DR	G1.04/G1.05	INTERSECTION W/ OLD ROANE ST	E.O.L. LINE D
MARGRAVE DR	G1.05	INTERSECTION W/ LINCOLN DR	300 LF E OF INTERSECTION W/ LINCOLN DR
POWELL AVE	G1.05	INTERSECTION W/ S. ROANE ST	INTERSECTION W/ CARLOCK AVE

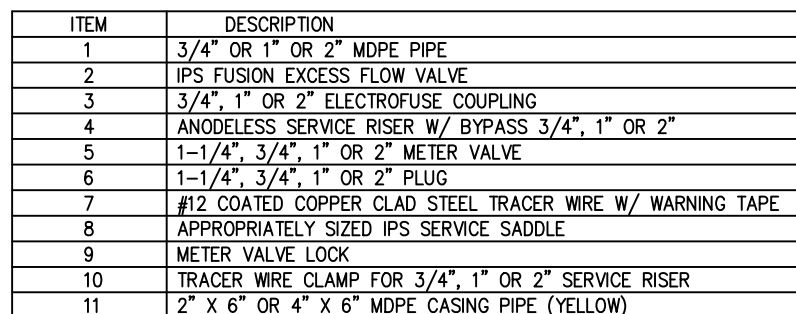

1. CONTACT SIDEFALLS AROUND AND UNDER SERVICE CONNECTION.
2. TEST COMPLETE SERVICE LINE PRIOR TO TAPPING MAIN.
3. EFV TO BE INSTALLED OUTSIDE OF ASPHALT, CONCRETE PAVEMENT, CURB & GUTTER, ETC, BUT AS CLOSE AS PRACTICAL TO MAIN.
4. SERVICE LINE TRACER WIRE SHALL BE CONNECTED TO MAIN LINE TRACER WIRE TO INSURE CONTINUITY OF SERVICE.
5. WIRE CONNECTOR: 1/2" OD COPPER DRY BUSH LUG YELLOW, WC-10 RED LOW VOLTAGE BY WIDE CONNECTORS OR PRE-APPROVED EQUAL.
6. INSTALL NEW RISER & CUTOFF VALVE TIE-INTO EX. METER.
7. INSTALL 2 INCH PE CURB VALVE ON 2 INCH SERVICES BETWEEN MAIN AND EFV.
8. INSTALL WARNING TAPE ON SERVICE LINES INSTALLED BY OPEN CUT.
9. VERIFY DIAMETER OF SERVICES PRIOR TO ORDERING MATERIALS.

N.T.S.

	R.O.W.
STANDARD DEPTH	36"
MINIMUM DEPTH	30"
MAXIMUM DEPTH	48"

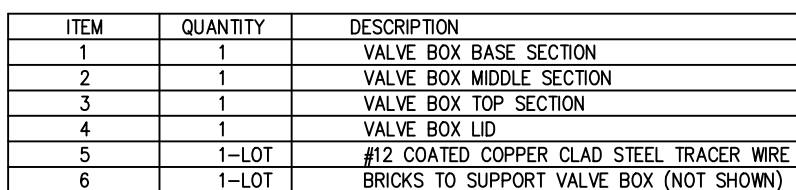


N.T.S.



1. AFTER EXISTING GAS LINE(S) HAVE BEEN RETIRED, SAW CUT EXISTING PAVEMENT A MINIMUM OF 1 FOOT BEYOND THE OUTSIDE EDGE OF VALVE TO A MINIMUM DEPTH OF 1 FOOT.
2. CUT VALVE BOX AT 1 FOOT BELOW GRADE, REMOVE TOP PORTION, AND DISPOSE OF REMOVED MATERIAL PROPERLY. CONTRACTOR MAY REMOVE ENTIRE TOP SECTION OF VALVE BOX (OR MANHOLE) WITHOUT CUTTING IF APPROPRIATE, AT NO ADDITIONAL COST TO OWNER.
3. PROVIDE CRUSHER RUN FOR LEVELING COURSE TO 1 FOOT BELOW GRADE.


N.T.S.

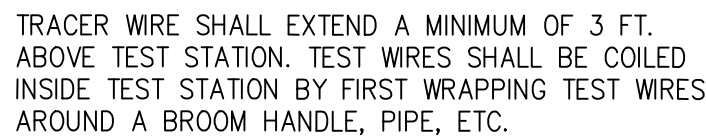

N.T.S.



	R.O.W.
STANDARD DEPTH	36"
MINIMUM DEPTH	30"
MAXIMUM DEPTH	48"

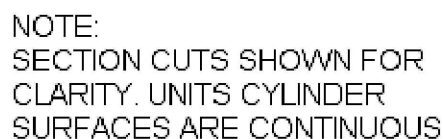

- NOTE: TEST STATIONS AND ANODES SHALL BE INSTALLED IN GRASSED AREAS. SEE SECTION 33 51 23.

CATHODIC PROTECTION TEST STATION & ANODE INSTALLATION

N.T.S.



 INITIAL ISSUE FOR CONSTRUCTION		08/07/2019	
REVISIONS		DATE	
 CANNON & CANNON INC. CONSULTING ENGINEERS - FIELD SURVEYORS TEL. 865.670.8555 8550 Kingston Pike WWW.CANNON-CANNON.COM Knoxville, TN 37919			
CLIENT:		HARRIMAN UTILITY BOARD 200 NORTH ROANE STREET HARRIMAN, TN 37748 (865) 882-3242	
PROJECT:		CAST IRON GAS MAIN REPLACEMENT PHASE III & IV HARRIMAN, TN	
GAS DETAILS			
		CCI PROJECT NO. 00923-0010	
		DRAWING DATE AUGUST 7, 2019	
		PM WWL	QC SAF
		DRAWN WBW	PIC WHC
		G2.01	