

SBS-2W







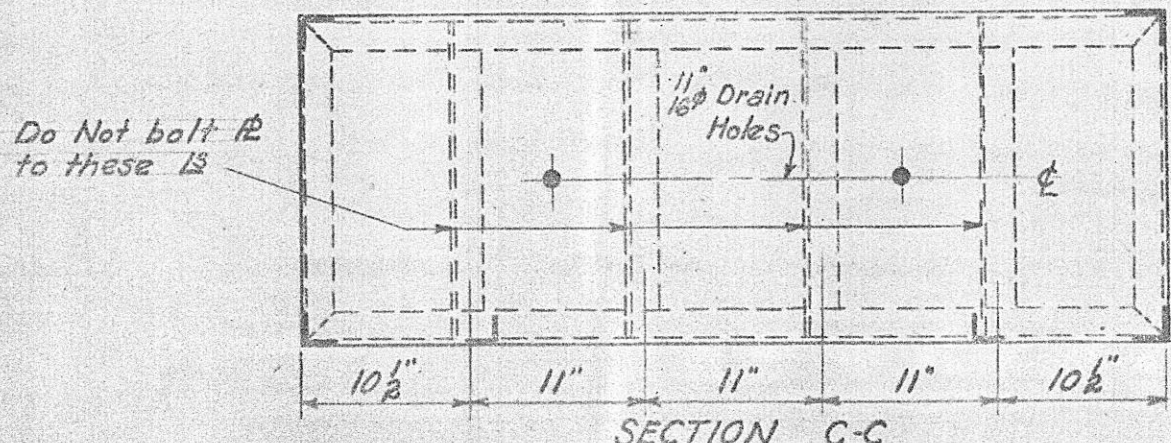



FIG. NO.	A	B	C	D	E	F	G
3	4'-4"	4'-0"	4'-2 3/4"	2'-3"	1'-2 1/4"	2'-3"	0'-4 1/2"
2	4'-4"	4'-0"	4'-2 3/4"	2'-3"	1'-2 1/4"	1'-11"	0'-2 1/2"
1	3'-4"	3'-0"	3'-2 3/4"	1'-1"	0'-4"	1'-11"	0'-2 1/2"

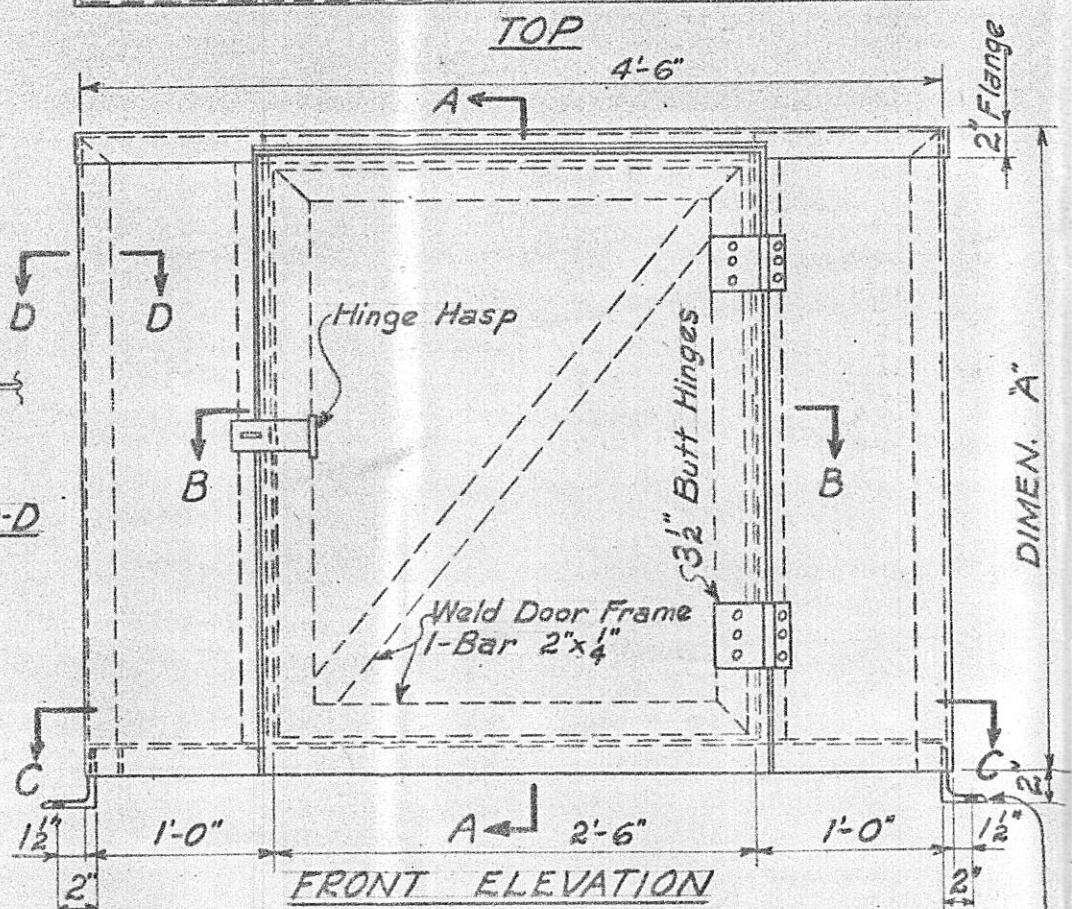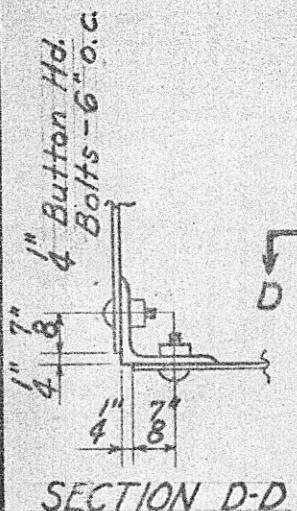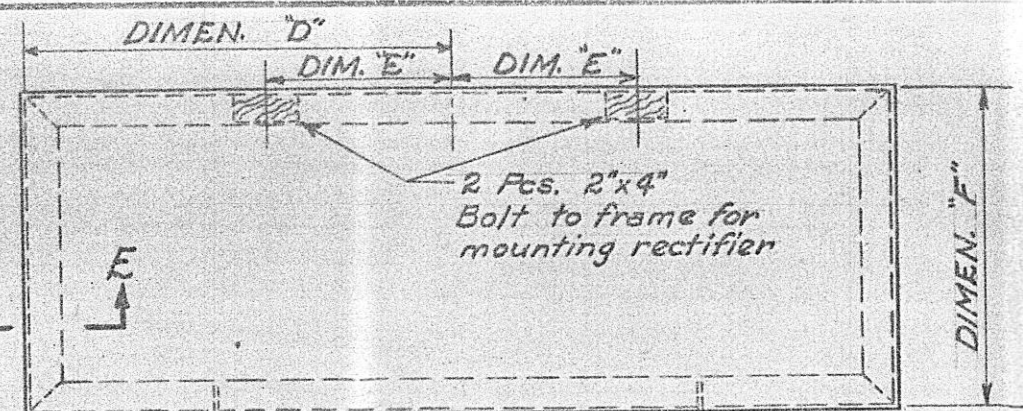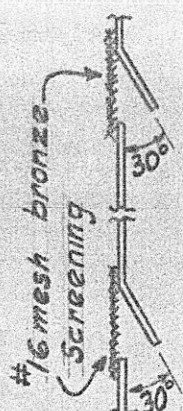


SECTION F-F
Thru Louvre

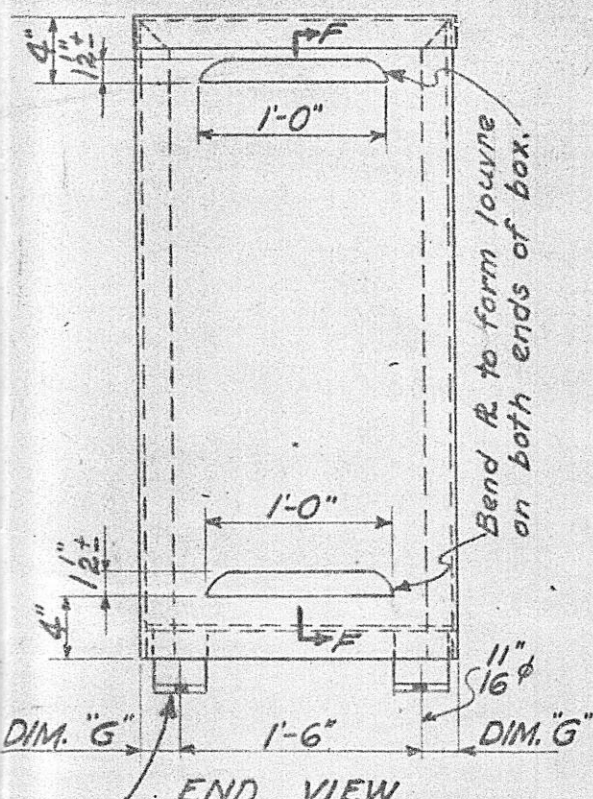

L-3 1/2"x3"x4"x3"

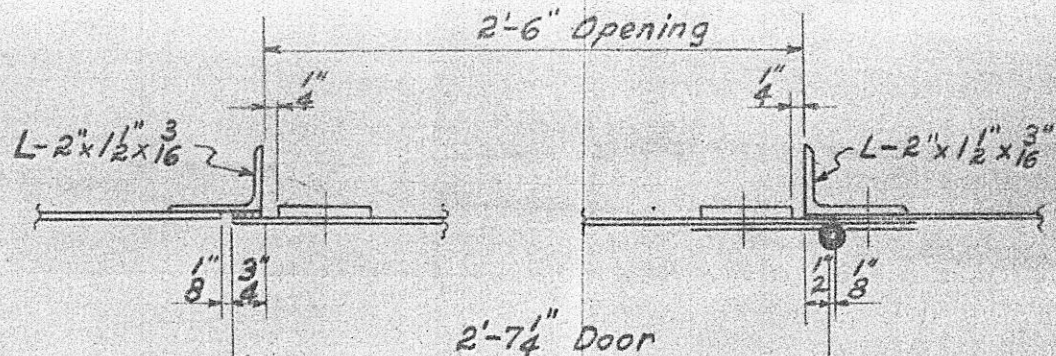

SECTION B-B
Thru Door

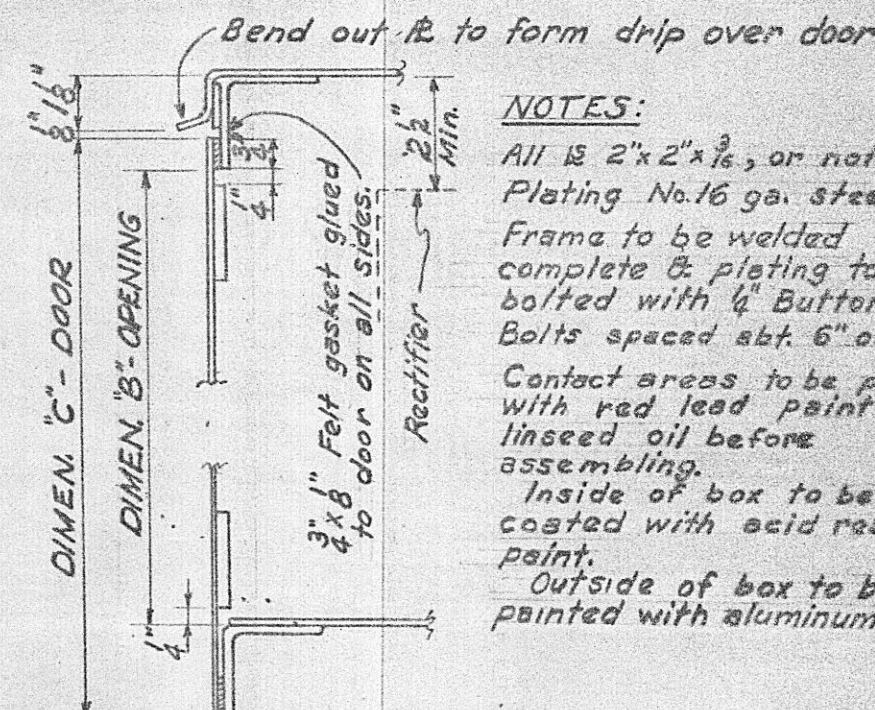

SECTION A-A
Thru Door

NOTES:
All is 2"x2"x3/16, or noted.
Plating No. 16 ga. steel.
Frame to be welded complete & plating to be bolted with 1/4" Button Hd. Bolts spaced abt. 6" o.c.
Contact areas to be painted with red lead paint and linseed oil before assembling.
Inside of box to be coated with acid resisting paint.
Outside of box to be painted with aluminum paint.

TENNESSEE VALLEY AUTHORITY
DIVISION OF POWER PLANNING AND ENGINEERING

SUBSTATIONS GENERAL
BOX FOR BATTERY AND RECTIFIER

REDRAWN					
REV. NO.	DATE	DSGN.	DRWN.	CHKD.	SUPV.
4	10-21-67		PM		VE
DSGN.		SUPV.			
DRWN. JHS		W.O.			
CHKD.		PROJ. ENGR.			

DATE 8-5-35	SUBMITTED	APPROVED	SHEET OF SHEETS
SCALE NONE	CLASS CODE	Horreben	MC-585

COPY 3013 R4